



FRENCH-OWNED COMPANY  
WITH MANUFACTURING OPERATIONS IN CHINA

# CATALOGUE 2026



Sino Concept is a French-owned  
and operated manufacturing  
group specialising in the  
production of steel, rubber, and  
plastic products.

## CONTENTS

Durable & Reliable

### ROAD & TRAFFIC SAFETY DEVICES

SPEED CUSHIONS.....	04
LANE DIVIDERS .....	05
GLASS ROAD STUDS .....	05
ALUMINIUM ROAD STUDS.....	06
RUBBER-BASED ROAD STUDS .....	06
PLASTIC ROAD STUDS .....	06
STEEL-BASED ROAD STUDS .....	06

### CAR PARK SAFETY MANAGEMENT

SPEED BUMPS .....	08
ONE-PART SPEED BUMP .....	10
SPEED HUMPS.....	10
WHEEL STOPS .....	11
HGV WHEEL STOP.....	13
FLOOR BIKE RACKS .....	14
PARKING BARRIER (STANDARD).....	16
PARKING BARRIER (HEAVY DUTY).....	16
WALK BEHIND SALT SPREADER 25L .....	16
WALK BEHIND SALT SPREADER 45L.....	16

### TRAFFIC CONTROL EQUIPMENT

TRAFFIC SAFETY CONES.....	18
METAL ROADWORKS BEACONS .....	20
PLASTIC ROADWORKS BEACON .....	20
SCANDINAVIAN DELINEATOR PANEL.....	21
BALLAST SANDBAG .....	21
EXPANDABLE STEEL BARRIER .....	22
MANHOLE SAFETY BARRIER.....	22

### EVENT MANAGEMENT

CABLE RAMPS .....	24
MODULAR CABLE RAMPS.....	26
DDA CABLE RAMPS.....	28
CABLE PROTECTOR RAMPS - 1200MM .....	29
HOSE PROTECTOR RAMPS .....	29
DROP OVERS .....	30
FLOOR CABLE COVERS.....	30
CROWD CONTROL BARRIERS.....	31
CROWD BARRIER STILLAGE .....	31

### STREET FURNITURE

BALL-TOP BOLLARDS.....	34
GROOVE BOLLARDS.....	34
DECORATIVE BOLLARDS .....	34
MITRE-TOP BOLLARDS .....	35
3 GROOVES BOLLARDS .....	35
DOME-TOP BOLLARDS .....	35
LOCKABLE REMOVABLE BOLLARD SOCKET .....	35
FLAT-TOP BOLLARDS .....	35
CROSS PEDESTRIAN GUARDRAIL.....	36
DIAMOND PATTERN .....	36
PEDESTRIAN GUARDRAIL.....	36
SHANGHAI PEDESTRIAN GUARDRAIL .....	36
BALL-TOP PEDESTRIAN GUARDRAIL .....	36
DECORATIVE OUTDOOR TRASH BINS .....	38
HOOPED PERIMETER BARRIERS.....	38
LAMP POST PROTECTOR HOOPS .....	39
POLE AND COLUMN PROTECTORS .....	39

# Road and Traffic Safety Devices


SPEED CUSHIONS .....	04
LANE DIVIDERS .....	05
GLASS ROAD STUDS.....	05
ALUMINIUM ROAD STUDS .....	06
RUBBER-BASED ROAD STUDS .....	06
PLASTIC ROAD STUDS.....	06
STEEL-BASED ROAD STUDS .....	06

## SPEED CUSHIONS



**Durable and Eco-Friendly:** Speed cushions made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, and weatherproof. Provides long-lasting protection, ideal for mid-sized parking areas.

### ACCESSORIES:

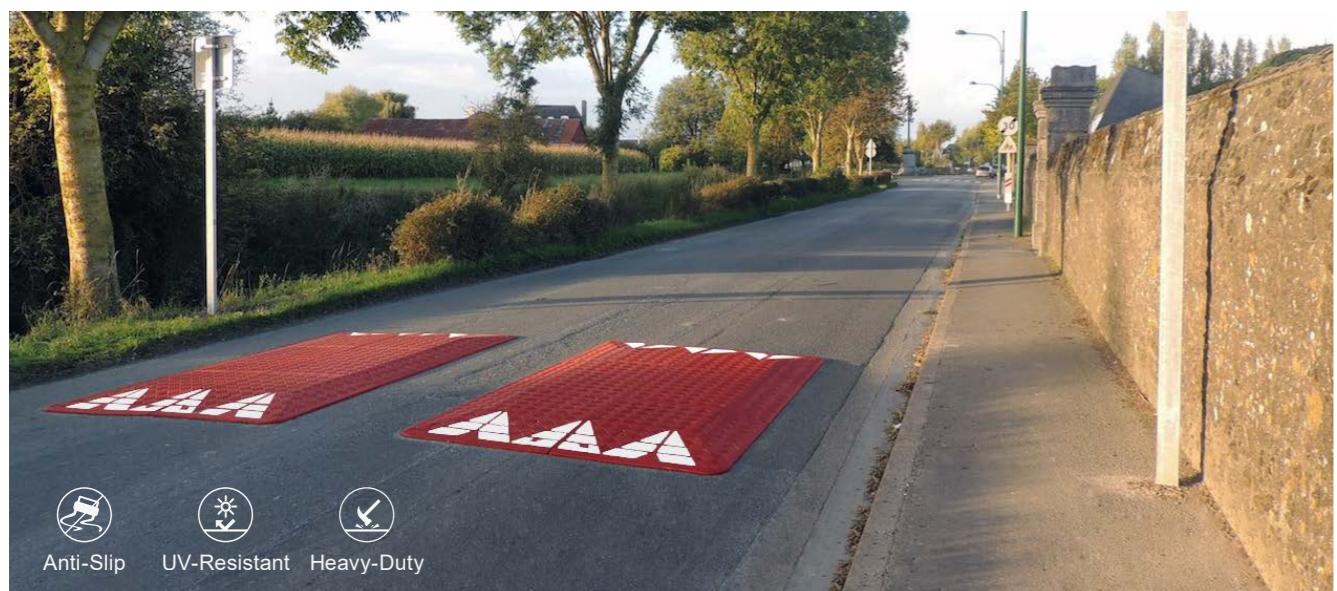

**SKID-PROOF SURFACE**  
Non-slip surface for better grip.

**REFLECTIVE FILMS**  
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.

**HEAVY-DUTY HARDWARE**  
Premium-quality screws and plastic anchors – rust-proof and highly durable.

**AVAILABLE IN BLACK**  
Other colours on request.

**COMPANY NAME OR LOGO**  
Can be moulded-in for easy identification.

**CUSTOM-MADE PACKING**  
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS (L*W*H)
4 Parts (2 right corners + 2 left corners)	2000 x 1800 x 65 mm (6.56' x 5.9' x 2.56")
6 Parts (2 right corners + 2 left corners + 2 middle parts)	3000 x 1800 x 65 mm (9.84' x 5.9' x 2.56")

## LANE DIVIDERS



### PLASTIC-RUBBER COMPOSITE

Cost-effective, UV-resistant, and very sturdy.



### REFLECTIVE FILMS

Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



### 360° SOLID GLASS ROAD STUD (PREMIUM VERSION)

Increases visibility and safety at night.



### AVAILABLE IN BLACK

Other colours on request.

### ACCESSORIES:



TYPE	DIMENSIONS (L*W*H)	GLASS ROAD STUDS
Eco (without road stud)	1000 x 130 x 50 mm (39.4" x 5" x 2")	/
Premium (with road stud)	1000 x 130 x 50 mm (39.4" x 5" x 2")	Ø 50 mm (Ø 1.97")

## GLASS ROAD STUDS



### TEMPERED GLASS CONSTRUCTION

Durable, long-lasting, with excellent performance after installation.



### AVAILABLE IN VARIOUS COLOURS

Different colours to improve visibility in various environments.



### 360° VISIBILITY

Optimal visibility in low light conditions.



### EN 1463 STANDARD COMPLIANT

Ensures high performance and durability according to EN 1463 standards.

TYPE	DIFFERENCE	DIMENSIONS (D*H)
Glass road stud - Small	Recycled rubber for the base	Ø 50 x 55 mm (2" x 2.2")
Glass road stud - Large	Only tempered glass	Ø 100 x 50 mm (4" x 2")



#### ■ ALUMINIUM ROAD STUDS

TYPE	DIMENSIONS (L*W*H)	MAX. LOAD
Heavy-duty	100 x 100 x 75 mm (4" x 4" x 3")	20 to 30 tons
Standard	100 x 100 x 75 mm (4" x 4" x 3")	10 tons



#### ■ PLASTIC ROAD STUDS

DIMENSIONS (L*W*H)	MAX. LOAD
100 x 100 x 20 mm (4" x 4" x 0.8")	5 to 10 tons




#### ■ RUBBER-BASED ROAD STUDS

DIMENSIONS (H*W*T)
145 x 86 x 70 mm (5.7" x 3.4" x 2.75")

#### ■ STEEL-BASED ROAD STUDS

TYPE	DIMENSIONS (L*W*H)
One side	110 x 50 x 70 mm (4.3" x 2" x 2.8")
Two sides	120 x 50 x 70 mm (4.7" x 2" x 2.8")

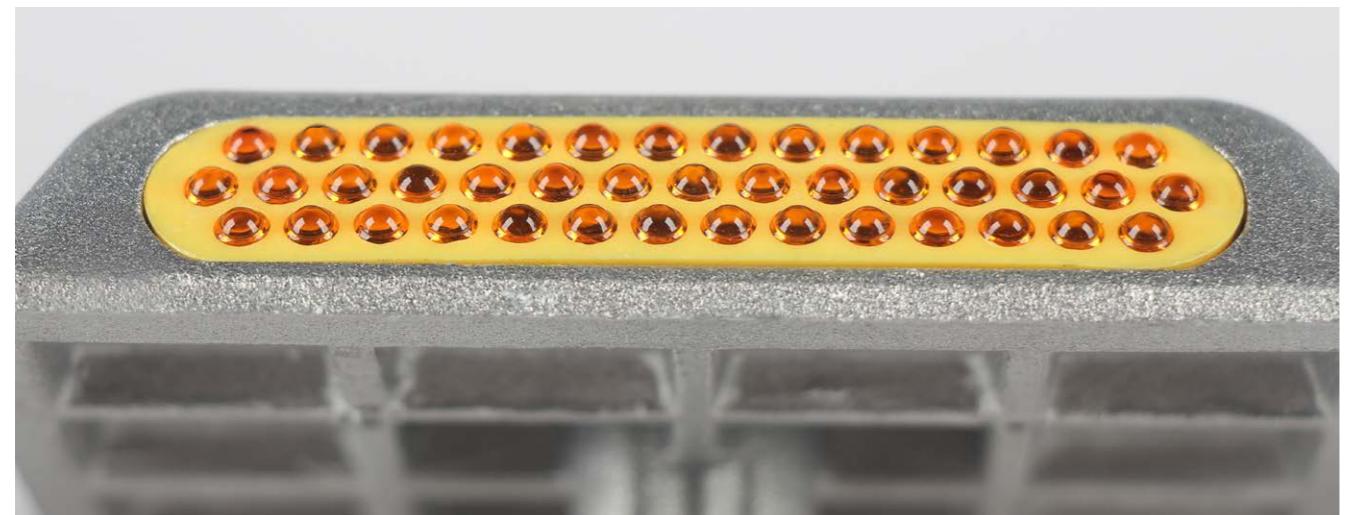

# Car Park Safety Management

SPEED BUMPS .....	08
ONE-PART SPEED BUMP .....	10
SPEED HUMPS .....	10
WHEEL STOPS.....	11
HGV WHEEL STOP .....	13
FLOOR BIKE RACKS .....	14
PARKING BARRIER (STANDARD) .....	16
PARKING BARRIER (HEAVY DUTY) .....	16
WALK BEHIND SALT SPREADER 25L.....	16
WALK BEHIND SALT SPREADER 45L.....	16



50 mm

70 mm

## SPEED BUMPS

**1. Standard version:** Suitable for light vehicles and light utility vehicles under normal usage conditions. Maximum Load Capacity: 20 tons per axle.

**2. Heavy-duty version:** Suitable for light utility vehicles, with enhanced durability. Maximum Load Capacity: 25 tons per axle.

### PARTS & ACCESSORIES:



HEIGHT	PART	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
50 mm	Middle part	500 x 350 x 50 mm (20" x 14" x 2")	Ø 30 mm (Ø 1.18")
50 mm	End cap	250 x 350 x 50 mm (10" x 14" x 2")	Ø 30 mm (Ø 1.18")
70 mm	Middle part	500 x 400 x 70 mm (20" x 16" x 2.76")	Ø 35 mm (Ø 1.38")
70 mm	End cap	250 x 400 x 70 mm (10" x 16" x 2.76")	Ø 35 mm (Ø 1.38")





 PARTS / ACCESSORIES:



TYPE	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
Middle part	1830 x 300 x 50 mm (6' x 12" x 2")	Ø 30 mm (Ø 1.18")
End cap	150 x 300 x 50 mm (6" x 12" x 2")	/

**ONE-PART SPEED BUMP**



**SKID-PROOF SURFACE**

Non-slip surface for better grip.




**180° GLASS BEAD REFLECTORS**

Highly visible in all conditions.



**CONVENIENT STORAGE**

Screws and anchors stored underneath for easy setup.



**2-IN-1 PRODUCT**

Built-in channels for cable protection.



**WHEEL STOPS**

**Durable and Eco-Friendly:** Car Park Wheel Stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

 ACCESSORIES:




 PARTS / ACCESSORIES:



HEIGHT	MIDDLE PART DIMENSIONS (L*W*H)	END CAP DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
30 mm (1.2")	500 x 600 x 30 mm (20" x 24" x 1.18")	250 x 600 x 30 mm (10" x 24" x 1.18")	/
50 mm (2")	500 x 600 x 50 mm (20" x 24" x 1.97")	250 x 600 x 50 mm (10" x 24" x 1.97")	2 x Ø 30 mm (Ø 1.18")
50 mm (2")	500 x 900 x 50 mm (20" x 35" x 1.97")	250 x 900 x 50 mm (10" x 35" x 1.97")	2 x Ø 30 mm (Ø 1.18")
70 mm (3")	500 x 900 x 70 mm (20" x 35" x 2.76")	250 x 900 x 70 mm (10" x 35" x 2.76")	2 x Ø 45 mm (Ø 1.77")
70 mm (3")	500 x 1200 x 70 mm (20" x 47" x 2.76")	250 x 1200 x 70 mm (10" x 47" x 2.76")	2 x Ø 45 mm (Ø 1.77")

**SPEED HUMPS**



**SKID-PROOF SURFACE**

Non-slip surface for better grip.




**INTERLOCKING SYSTEM**

Male and female connectors to prevent movement and allow quick installation.



**2-IN-1 PRODUCT**

Built-in channels for cable protection.



**HEAVY-DUTY STRUCTURE**

Thick walls and V-shaped ribs for maximum strength in tough conditions.



**CONVENIENT STORAGE**

Screws, anchors, and caps stored underneath for easy setup.

**AVAILABLE IN MORE COLOURS**

Available colours: Yellow, blue, white, red, etc.



## ■ HGV WHEEL STOP

**Durable and Eco-Friendly:** HGV wheel stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

### ❖ ACCESSORIES:



M12 Coach  
Screws, PE  
Plastic Anchors

### MATERIAL

Plastic-Rubber composite

### DIMENSIONS (L\*W\*H)

1000 x 300 x 150 mm (39.4" x 11.8" x 5.9")



### CONVENIENT STORAGE

Screws and anchors stored underneath for easy setup.





### INTEGRATED HIGH-VISIBILITY MARKING

Mould-in yellow marking for enhanced visibility and safety.



### EFFICIENT IMPACT DISTRIBUTION

Full-surface contact for stability and even impact distribution for durability.

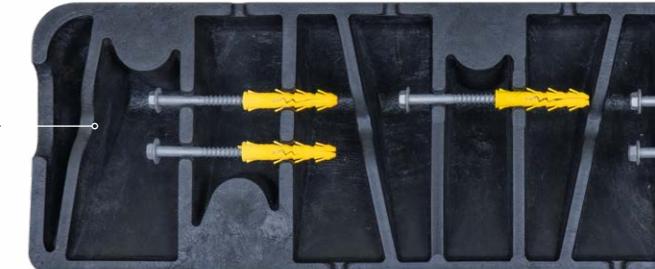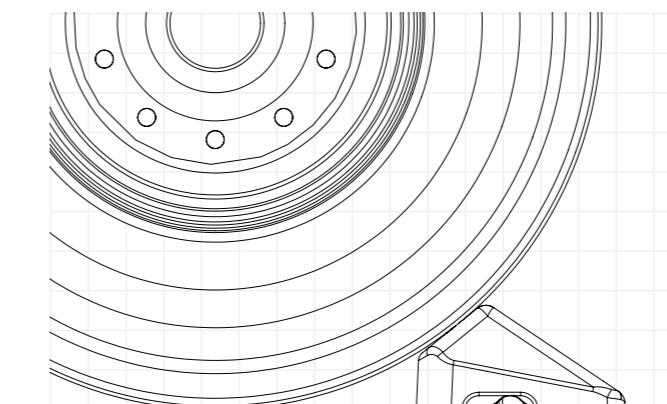


### CONVENIENT HANDLES

Easy to carry and to install.




## FLOOR BIKE RACKS



### ACCESSORIES:

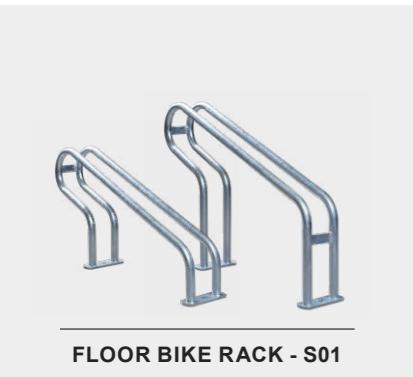
**FLOOR BIKE RACK - S01**

**FLOOR BIKE RACK - S02**

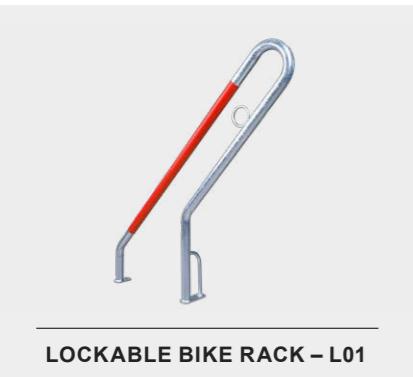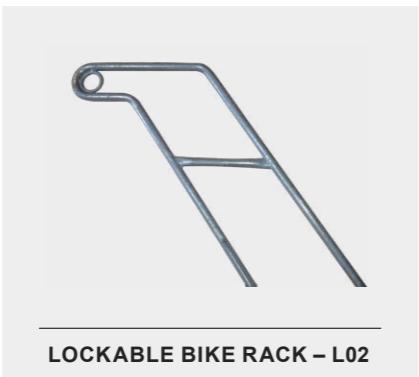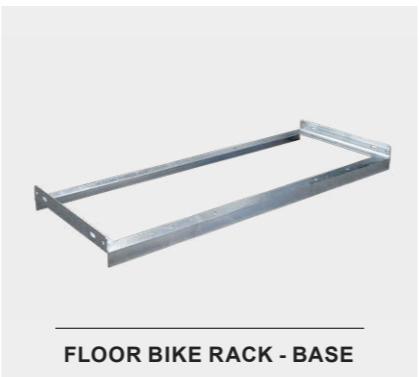**FLOOR BIKE RACK - S03**

**LOCKABLE BIKE RACK - L01**

**LOCKABLE BIKE RACK - L02**

**FLOOR BIKE RACK - BASE**

TYPE	TUBE DIAMETER	MAX. TYRE WIDTH
S01, S02, S03	Ø 18 mm (Ø 0.7")	45 mm (1.8")

TYPE	AVAILABLE LENGTHS	WIDTH
BASE	700 mm (27.6"), 1000 mm (39.4"), 1050 mm (41.3"), 1100 mm (43.3"), etc	395 mm (15.6")





#### ■ PARKING BARRIER (STANDARD)

**Material:** Mild steel tube.

**Surface Treatment:** Fully hot-dipped galvanised (after welding).



#### ■ PARKING BARRIER (HEAVY DUTY)

**Material:** Mild steel tube.

**Surface Treatment:** Fully hot-dipped galvanised (after welding).



TYPE	WIDTH	HEIGHT
STANDARD	700 mm (27.6")	430 mm (16.9")
HEAVY DUTY	880 mm (34.6")	440 mm (17.3")



Hopper colour:  
Customise

#### ■ WALK BEHIND SALT SPREADER 25L

**Hopper material:** Polypropylene (PP).

**Frame material:** Steel tubing and powder-coated anti-corrosion finish.

**Bolts, rods and linkages:** Steel and electro-galvanised.

**Spreader gear:** Nylon.



Hopper colour:  
Customise

#### ■ WALK BEHIND SALT SPREADER 45L

**Hopper material:** Polypropylene (PP).

**Frame material:** Steel tubing and powder-coated anti-corrosion finish.

**Spreader gear, bolts, rods and linkages:** 304 stainless steel.

#### TYPE

#### DIMENSIONS (L\*W\*H)

#### SPREADING WIDTH

Salt spreader 25 L

1120 mm x 560 mm x 850 mm (44.1" x 22.0" x 33.5")

3000 mm (118.1")

Salt spreader 45 L

1110 mm x 670 mm x 835 mm (43.7" x 26.4" x 32.9")

4000 mm (157.5")

# Traffic Control Equipment

TRAFFIC SAFETY CONES .....	18
METAL ROADWORKS BEACONS .....	20
PLASTIC ROADWORKS BEACON .....	20
SCANDINAVIAN DELINEATOR PANEL .....	21
BALLAST SANDBAG .....	21
EXPANDABLE STEEL BARRIER .....	22
MANHOLE SAFETY BARRIER .....	22



## TRAFFIC SAFETY CONES



### MAXI GRIP HANDLE

Handle with groove and textured grip for easy, efficient use, even with gloves.



### FILM PROTECTION

Reflective films are embedded with a 1 mm recess to prevent tearing.



### UNIQUE STACKING SYSTEM

Cone trunks stack apart, preventing sticking and protecting reflective films.


TYPE	HEIGHT	BASE DIMENSIONS	REFLECTIVE SHEETING HEIGHT	WEIGHT
300 mm	300 mm (11.8")	215 x 215 mm (8.5" x 8.5")	100 mm (3.9") x 1	0.5 kg (1.1 lbs)
500 mm	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.1 kg (2.4 lbs)
500 mm (weighted)	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.8 kg (4 lbs)
750 mm	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	2 kg (4.4 lbs)
750 mm (weighted 1)	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	3.2 kg (7.0 lbs)
750 mm (weighted 2)	750 mm (29.5")	365 x 365 mm (14.4" x 14.4")	150 mm (5.9") x 2	4.2 kg (9.3 lbs)
750 mm (highway)	750 mm (29.5")	400 x 400 mm (15.7" x 15.7")	150 mm (5.9") x 2	4.2 kg (9.3 lbs)




300 MM



500 MM

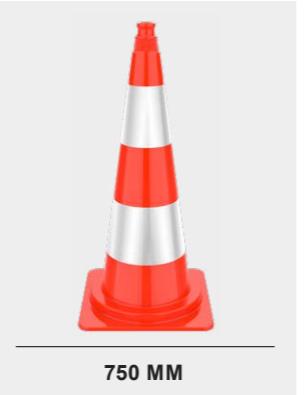

750 MM

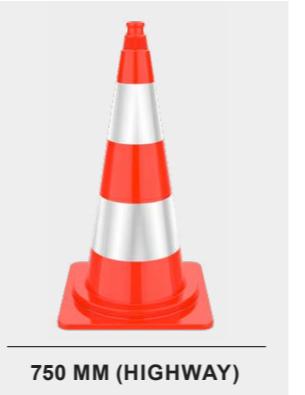

750 MM (HIGHWAY)



500 MM (WEIGHTED)



750 MM (WEIGHTED 1)




750 MM (WEIGHTED 2)




MORE COLOURS...



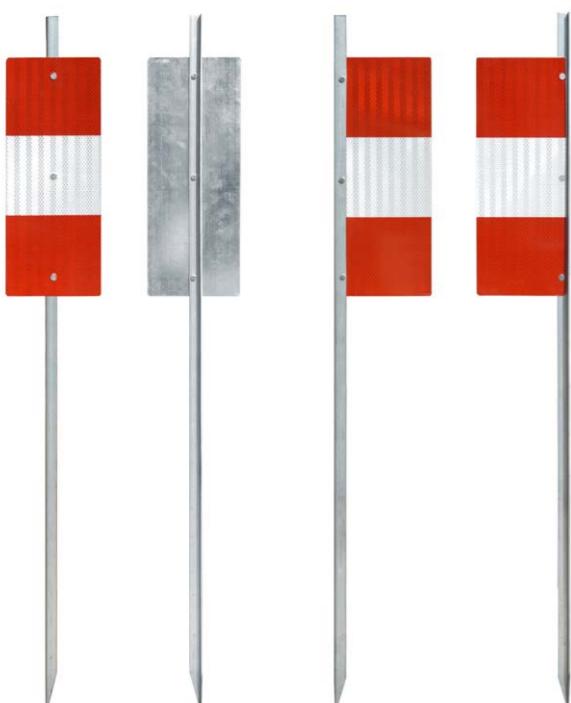

## METAL ROADWORKS BEACONS



**HIGHLY REFLECTIVE SHEETINGS**  
Engineering-Grade (RA1)  
High-Intensity Prismatic Grade (RA3).



**GALVANISED STEEL ANGLE & PLATE**  
Ensures durability and corrosion resistance.



**REINFORCED STEEL RIVETS**  
Ensures optimal durability, even under intensive use.



**ANGLED END**  
Allows fast and easy installation, even on hard ground.



## SCANDINAVIAN DELINEATOR PANEL



**HIGHLY REFLECTIVE SHEETINGS**  
Fluo Engineering-Grade (RA1)  
Fluo High-Intensity Prismatic Grade (RA3).



**DIRECTIONAL ARROW**  
Helps you to position the beacon in the correct direction.



**CONVENIENT HANDLE**  
Easy to carry and install.



**SAVE PACKING STORAGE**  
Stackable design saves space, prevents slipping, and keeps beacons organised.

HEIGHT	GALVANISED STEEL ANGLE	GALVANISED STEEL PLATE
1100 mm (43")	20 x 15 mm (0.78" x 0.59")	150 x 375 mm (5.9" x 14.7")

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Polypropylene (PP)	1000 x 225 x 22 mm (39.5" x 8.85" x 0.87")	800 x 190 mm (31.5" x 7.5")



## PLASTIC ROADWORKS BEACON



**CONVENIENT HANDLE**  
Easy to carry and install.



**HIGHLY REFLECTIVE SHEETINGS**  
Engineering-Grade (RA1)  
High-Intensity Prismatic Grade (RA3).



**DIRECTIONAL ARROW**  
Helps you to position the beacon in the correct direction.



**COMPANY NAME OR LOGO**  
Can be moulded-in for easy identification.



## BALLAST SANDBAG



**DOUBLE-STITCHED SEAMS**  
Strong stitching for long-lasting use.



**HEAVY-DUTY ROPE**  
Easy to carry and handle.



**8 ALUMINIUM EYELETS**  
Corrosion-resistant aluminium for a longer lifespan.



**COMPANY NAME OR LOGO**  
Screen-printed logo for easy identification.


MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Recycled high-density polyethylene (HDPE)	1300 x 280 x 60 mm (51" x 11" x 2.4")	1000 x 250 mm (39" x 10")

MATERIAL	DIMENSIONS (L*W)	DENSITY	CAPACITY
PVC-coated fabric	600 x 400mm (24" x 15")	640 g/m <sup>2</sup>	15 kg (33 lbs) – delivered empty

### EXPANDABLE STEEL BARRIER



#### PACKAGE:

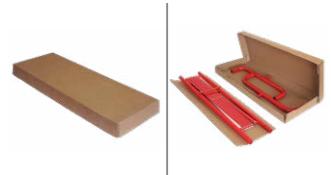

#### SEAMLESS, STRONG WELD

Strong welding to prevent cracks.



#### REINFORCED STEEL RIVETS

Ensures optimal durability, even under intensive use.



#### INTERLOCKING SYSTEM

For easy transportation and storage.




#### ANTI-SLIP FEET

Improves stability and ensures safety when installed.

HEIGHT	LENGTH	FINISHING TREATMENT
1000 mm (39")	Folded: 200 mm (8"), Unfolded: 2.85 m (9')	Anti-UV powder coating

### MANHOLE SAFETY BARRIER

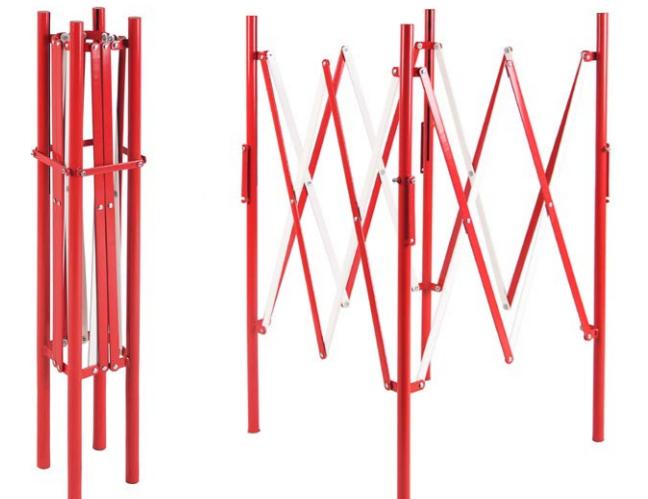

#### PACKAGE:



#### SEAMLESS, STRONG WELD

Strong welding to prevent cracks.



#### REINFORCED STEEL RIVETS

Ensures optimal durability, even under intensive use.



#### INTERLOCKING SYSTEM

For easy transportation and storage.



#### ANTI-SLIP FEET

Improves stability and ensures safety when installed.

HEIGHT	LENGTH & WIDTH	FINISHING TREATMENT
1000 mm (39")	Folded: 150 x 150 mm (6" x 6"), Unfolded: 1.5 x 1.5 m (4.9' x 4.9')	Anti-UV powder coating

# Event Management

CABLE RAMPS.....	24
MODULAR CABLE RAMPS.....	26
DDA CABLE RAMPS.....	28
CABLE PROTECTOR RAMPS - 1200MM.....	29
HOSE PROTECTOR RAMPS.....	29
DROP OVERS.....	30
FLOOR CABLE COVERS.....	30
CROWD CONTROL BARRIERS.....	31
CROWD BARRIER STILLAGES.....	31

## CABLE RAMPS

### Material of the base:




- Standard version:** Plastic-Rubber composite as a more economical option.
- Heavy-duty version:** Vulcanised rubber for flexibility and durability.

Both are REACH compliant, odourless, and built to last.

### 45° CORNER SECTIONS:



TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
2 Channels	990 x 240 x 45 mm (39" x 9.5" x 1.8")	30 x 32 mm (1.18" x 1.26")
3 Channels	900 x 500 x 70 mm (35.5" x 20" x 2.75")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")
5 Channels	900 x 500 x 50 mm (35.5" x 20" x 2")	38 x 32 mm (1.5" x 1.26")

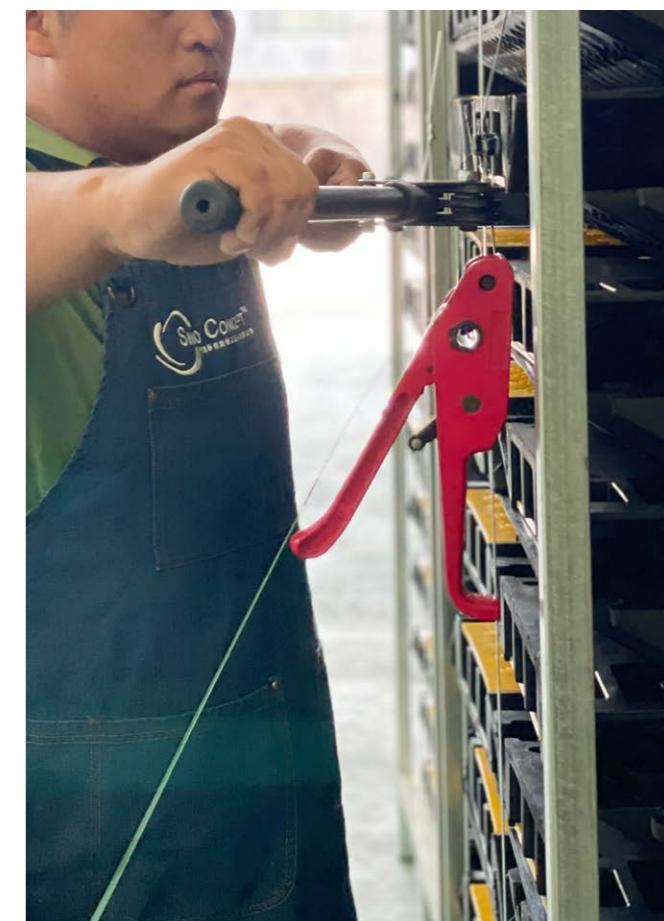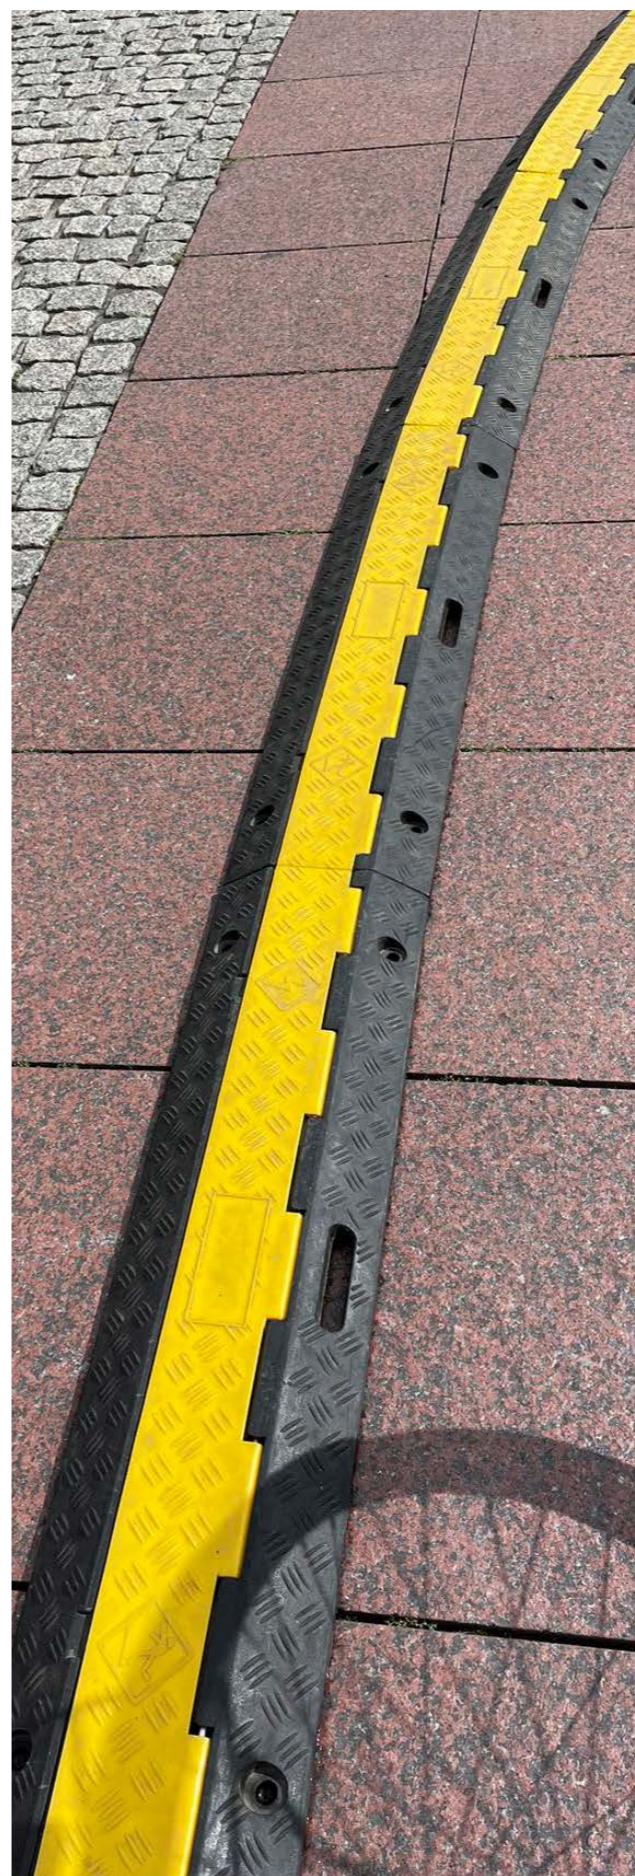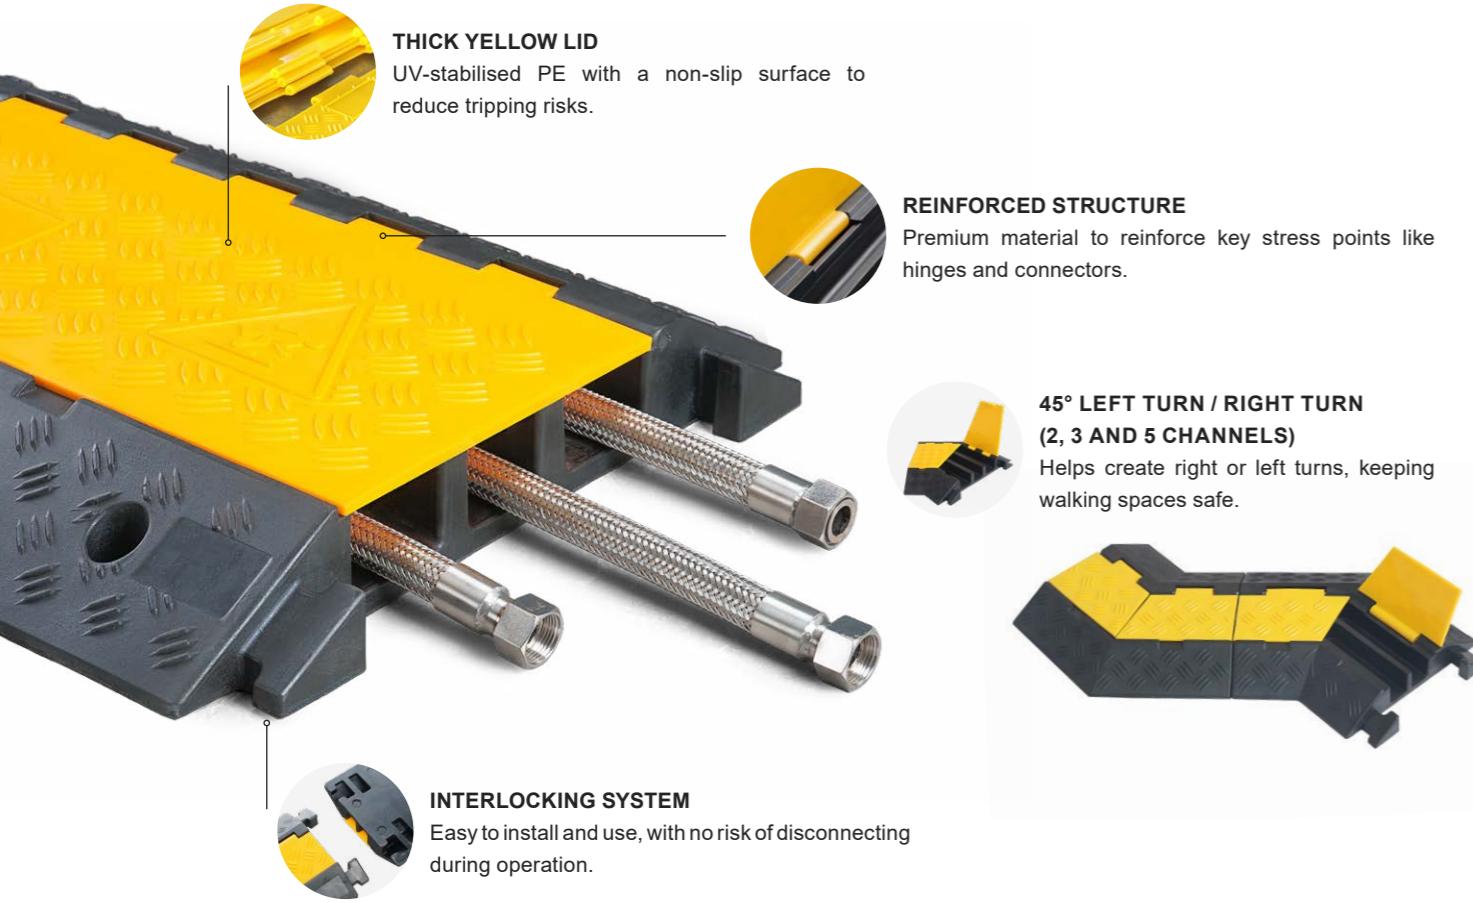

## ■ MODULAR CABLE RAMPS



### Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

### compatible product / accessories:




TYPE	DIMENSIONS (L*W*H, EXCLUDING CONNECTORS)	CHANNEL DIMENSIONS (W*H)
Middle part	895 x 370 x 50 mm (35.2" x 14.6" x 2")	37.5 x 35 mm (1.48" x 1.38")
Standard ramp	895 x 140 x 50 mm (35.2" x 5.5" x 2")	/
Gentle slope ramp	895 x 500 x 50 mm (35.2" x 19.7" x 2")	/
Half gentle slope ramp	447.5 x 500 x 50 mm (17.6" x 19.7" x 2")	/



MIDDLE PART



STANDARD RAMP

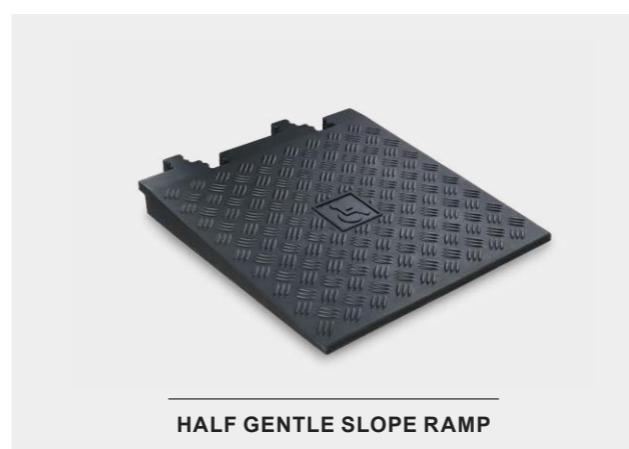

HALF GENTLE SLOPE RAMP



GENTLE SLOPE RAMP



SKID-PROOF SURFACE  
Non-slip surface for better grip.



INTERLOCKING SYSTEM  
Easy to install and use, with no risk of disconnecting during operation.



GENTLE SLOPE RAMP  
5° incline for smooth and easy access for wheelchairs and pedestrians.



FLEXIBLE MODULAR DESIGN  
The modular cable ramp allows for easy and flexible assembly to suit various needs.



### COMPATIBLE WITH 5-CHANNEL CABLE RAMP

The middle modular cable ramp seamlessly connects with our 5-channel cable ramps using H-Connectors, ensuring a secure and continuous cable protection system.



## ■ DDA CABLE RAMPS



### Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

### compatible product :



2 CHANNELS

3 CHANNELS

5 CHANNELS



### BUILT-IN HANDLE

Easy to transport and reduces fatigue, saving time during installation and storage.



### INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.



### NYLON ROD

Integrated nylon rod securely connects the base and yellow cover, preventing detachment.




### DDA/ADA COMPLIANT

Meets the requirements of the DDA and ADA standards, ensuring accessibility.


TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
2 Channels	990 x 915 x 45 mm (39" x 36" x 2")	30 x 32 mm (1.18" x 1.26")
3 Channels	450 x 1472 x 70 mm (17.7" x 57.9" x 2")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")
5 Channels	450 x 1090 x 50 mm (17.7" x 42.9" x 2")	38 x 32 mm (1.5" x 1.26")

## ■ CABLE PROTECTOR RAMPS - 1200MM

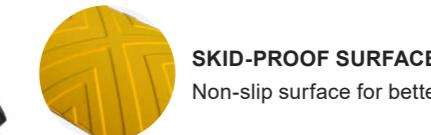


### SKID-PROOF SURFACE

Non-slip surface for better grip.

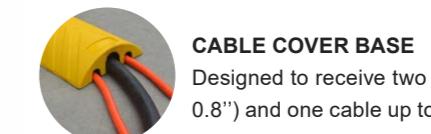


### CABLE COVER BASE

Designed to receive two cables up to Ø 20 mm (Ø 0.8") and one cable up to Ø 40 mm (Ø 1.6").

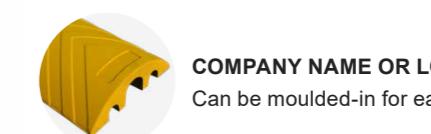

### COMPANY NAME OR LOGO

Can be moulded-in for easy identification.

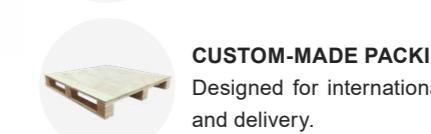

### CUSTOM-MADE PACKING


Designed for international shipping, easy storage and delivery.

### DIMENSIONS (L\*W\*H)

1200 x 200 x 60 mm (47" x 8" x 2.5")

### MAX. CABLE DIAMETER

1 x Ø 42 mm (Ø 1.65") and 2 x Ø 20 mm (Ø 0.8")

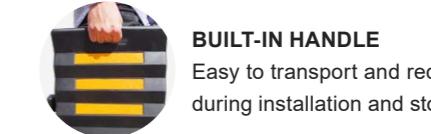


### BUILT-IN HANDLE

Easy to transport and reduces fatigue, saving time during installation and storage.




### REFLECTIVE FILMS

Embedded thermoplastic reflective road marking films to enhance visibility and safety.

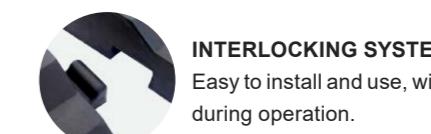

### INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.

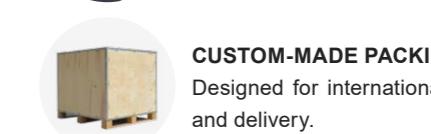

### CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	MAX. WEIGHT CAPACITY
850 x 300 x 85 mm (33" x 12" x 3.3")	90 x 70 mm (3.54" x 2.76")	9,000 kg (20,000 lbs) per axle
970 x 300 x 130 mm (38" x 12" x 5")	110 x 110 mm (4.33" x 4.33")	20,000 kg (44,000 lbs) per axle

## ■ DROP OVERS



❖ OPTIONAL COLOURS:



**SKID-PROOF SURFACE**  
Non-slip surface for better grip.



**MADE OF THERMOPLASTIC POLYURETHANE**  
Flexible material that perfectly fits uneven floors.



**INTERLOCKING SYSTEM**  
Easy to install and use, with no risk of disconnecting during operation.



**ANTI-SLIP PADS**  
Improves grip on smooth surfaces.



## ■ CROWD CONTROL BARRIERS



**SEAMLESS, STRONG WELD**  
Strong welding to prevent cracks.



**FULLY HOT-DIPPED GALVANISED (MINIMUM 80 MICRONS)**  
Highly corrosion-resistant treatment that prevents rust.



**PATENTED HANDLE**  
Allows carrying two barriers at once (unique on the market).



**REINFORCED INTERLOCKING SYSTEM**  
Extra-thick 5 mm connectors for strong and stable use.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
Small	914 x 135 x 22 mm (36" x 5.25" x 0.87")	40 x 14 mm (1.57" x 0.55")
Large	914 x 280 x 40 mm (36" x 11" x 1.57")	104 x 30 mm (4" x 1.25")

TYPE	DIMENSIONS (L*H)	TUBE DIAMETERS
Crowd barrier - 1 Metre	1000 x 1090 mm (39" x 43")	Frame: Ø 32 mm (Ø 1.3"), 6 Inner rails: Ø 16 mm (Ø 0.6")
Crowd barrier - 2 Metres	2000 x 1090 mm (79" x 43")	Frame: Ø 32 mm (Ø 1.3"), 14 Inner rails: Ø 16 mm (Ø 0.6")

## ■ FLOOR CABLE COVERS



**SKID-PROOF SURFACE**  
Non-slip surface for better grip.



**1 CHANNEL - TOP SLIT**  
To install the cable from the top.




**3 CHANNELS - TOP & BOTTOM SLIT**  
To install the cable from the top & bottom.



**CUSTOM-MADE PACKING**  
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS	MAX. CABLE DIAMETER
1 Channel	10,000 x 100 x 30 mm (33' x 4" x 1.2")	Ø 20 mm (Ø 0.8")
3 Channels	4,000 x 160 x 50 mm (13' x 6" x 2")	1 x Ø 40 mm (Ø 1.6") and 2 x Ø 20 mm (Ø 0.8")

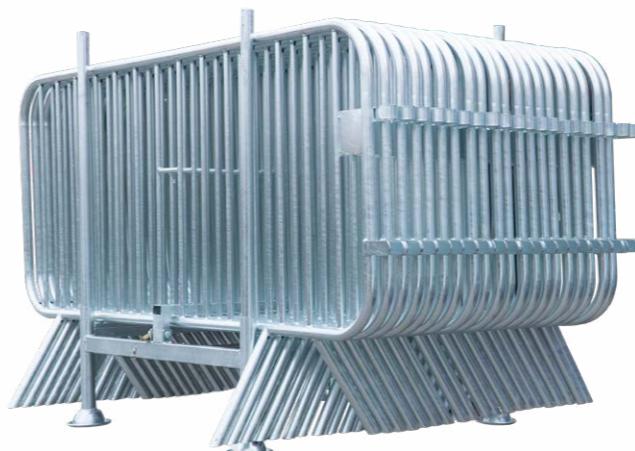

## ■ CROWD BARRIER STILLAGE



**SEAMLESS, STRONG WELD**  
Strong welding to prevent cracks.



**FULLY HOT-DIPPED GALVANISED (MINIMUM 80 MICRONS)**  
Highly corrosion-resistant treatment that prevents rust.





**SINGLE LOCK SYSTEM**  
Simple and effective, prevents the loss of crowd control barriers.



**STACKING SYSTEM**  
Stable stacking for easy management.




DIMENSIONS (L*W*H)	CONTAINS
980 x 910 x 1200 mm (38.6" x 35.8" x 47.2")	20 Pieces of crowd barriers

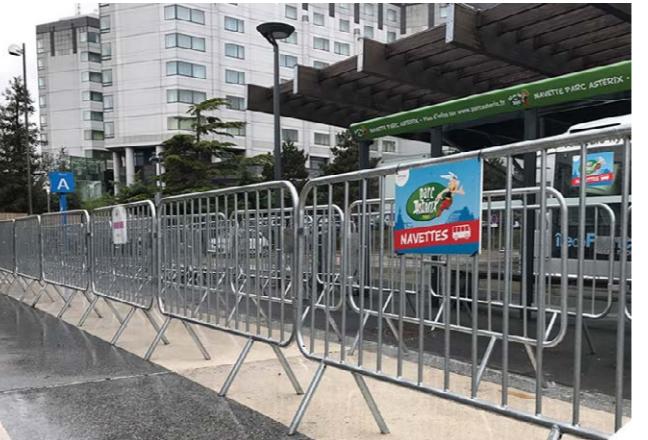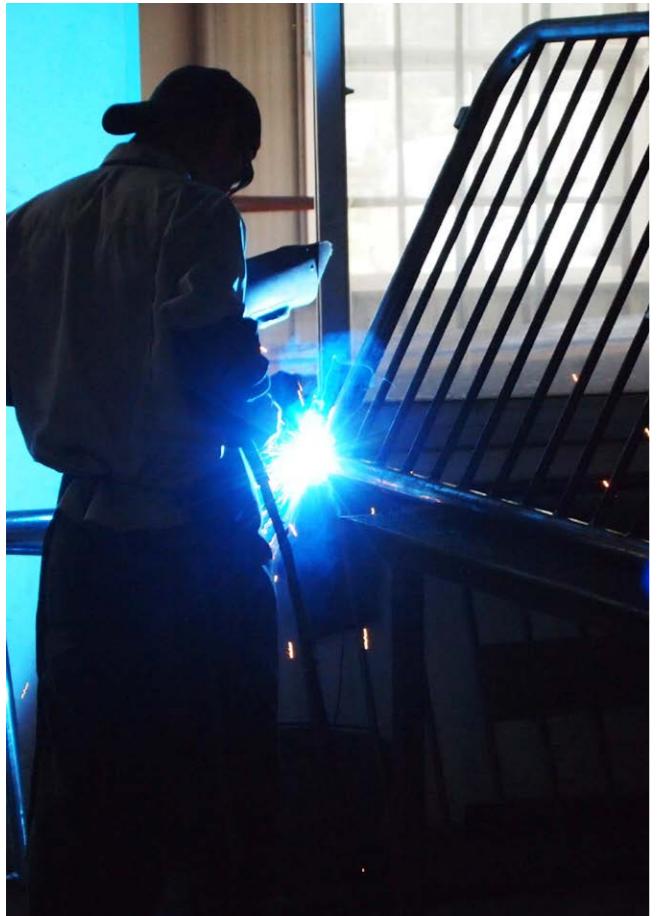

# Street Furniture

BALL-TOP BOLLARDS .....	34
GROOVE BOLLARDS .....	34
DECORATIVE BOLLARDS .....	34
MITRE-TOP BOLLARDS .....	35
3 GROOVES BOLLARDS .....	35
DOME-TOP BOLLARDS .....	35
LOCKABLE REMOVABLE BOLLARD SOCKET .....	35
FLAT-TOP BOLLARDS .....	35
CROSS PEDESTRIAN GUARDRAIL .....	36
DIAMOND PATTERN .....	36
PEDESTRIAN GUARDRAIL .....	36
SHANGHAI PEDESTRIAN GUARDRAIL .....	36
BALL-TOP PEDESTRIAN GUARDRAIL .....	36
DECORATIVE OUTDOOR TRASH BINS .....	38
HOOPED PERIMETER BARRIERS .....	38
LAMP POST PROTECTOR HOOPS .....	39
POLE AND COLUMN PROTECTORS .....	39

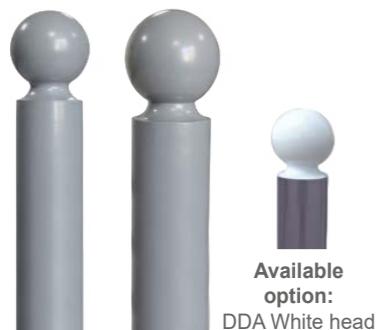

Available option:  
DDA White head



Available option:  
DDA White head



Available option:  
DDA White head

### BALL-TOP BOLLARDS



### GROOVE BOLLARDS

All our metal products are available in various surface and finishing treatments:

- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating


### DECORATIVE BOLLARDS

TYPE	DIAMETER	HEIGHT
Ball-top bollard	Ø76 mm / 114 mm	1200 mm / 1500 mm
Groove bollard	Ø76 mm / 102 mm	1200 mm / 1500 mm
Decorative bollard	Ø60 mm	1200 mm / 1500 mm




Available option:  
DDA White head

### 3 GROOVES BOLLARDS

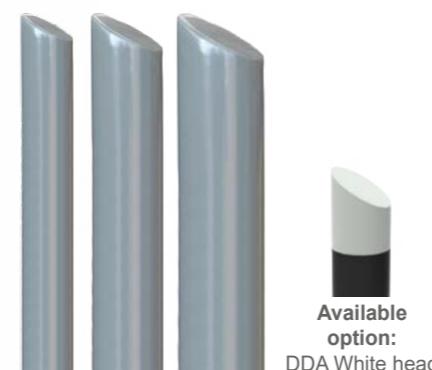

Available option:  
DDA White head

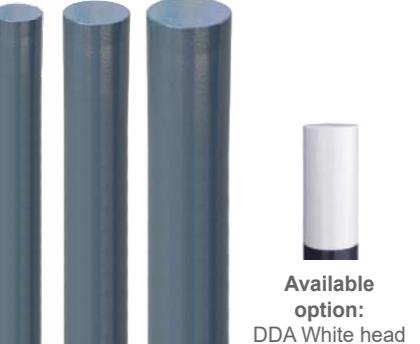

Available option:  
DDA White head

### FLAT-TOP BOLLARDS



Available option:  
DDA White head

### MITRE-TOP BOLLARDS

TYPE	DIAMETER	HEIGHT
3 Grooves bollard	Ø76 mm	1200 mm / 1500 mm
Flat-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm
Mitre-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm
Dome-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm

### DOME-TOP BOLLARDS



Ø76 mm

Ø102 mm

### LOCKABLE REMOVABLE BOLLARD SOCKET

**Material**  
Mild steel tube.

**Surface Treatment**  
Fully hot-dipped galvanised (after welding).

**Finishing Treatment**  
Anti-UV powder coating.



TYPE	DIAMETER	HEIGHT
Lockable removable bollard socket	Ø76 mm / 102 mm	275 mm


**CROSS PEDESTRIAN GUARDRAIL**

**SHANGHAI PEDESTRIAN GUARDRAIL**

TYPE	HEIGHT	LENGTH
Cross pedestrian guardrail	1100 mm	1640 mm / 840 mm
Shanghai pedestrian guardrail	1250 mm	1500 mm / 1000 mm



All our metal products are available in various surface and finishing treatments:

- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating


**DIAMOND PATTERN PEDESTRIAN GUARDRAIL**

**BALL-TOP PEDESTRIAN GUARDRAIL**

TYPE	HEIGHT	LENGTH
Diamond pattern pedestrian guardrail	1100 mm	1640 mm / 840 mm
Ball-top pedestrian guardrail	1100 mm	1640 mm / 840 mm



## DECORATIVE OUTDOOR TRASH BINS



**Material**  
Mild steel tube.

**Surface Treatment**  
Options 1: Zinc-rich primer powder.  
Options 2: Fully hot-dipped galvanised (after welding).

**Available Finishing Treatment**  
Anti-UV powder coating.



TYPE	DIAMETER	HEIGHT	CAPACITY
Trash can	Ø350 mm	780 mm	50 L



**Material**  
Mild steel tube.

**Surface Treatment**  
Fully hot-dipped galvanised (after welding).

**Available Finishing Treatment**  
Anti-UV powder coating.



TYPE	HEIGHT	WIDTH
Surface mounted	690 mm	560 mm
Embedded	870 mm	560 mm

## HOOPED PERIMETER BARRIERS



**Material**  
Mild steel tube.

**Surface Treatment**  
Fully hot-dipped galvanised (after welding).

**Available Finishing Treatment**  
Anti-UV powder coating.

Customise your hoop barriers

with our different options:



### CROSSBAR

For an increased resistance and safety



### BASE PLATE

To be fixed directly to surface for easy install



**Material**  
Mild steel tube.

**Surface Treatment**  
Fully hot-dipped galvanised (after welding).

**Available Finishing Treatment**  
Anti-UV powder coating.



TYPE	LENGTH	HEIGHT
Surface mounted	1000, 1500, 2000 mm	1000 mm
Embedded	1000, 1500, 2000 mm	1300 mm

TYPE	LENGTH	WIDTH	HEIGHT
Surface mounted	600 mm	600 mm	500 mm
Embedded	600 mm	600 mm	680 mm



FRENCH-OWNED COMPANY  
WITH MANUFACTURING OPERATIONS IN CHINA

## THANK YOU FOR YOUR INTEREST IN OUR PRODUCTS!

For more products and details, please visit our website:

<https://www.sinoconcept.com>



### PRODUCTION & OPERATIONS CENTRE:

27 Ping Xiang Road, Shibei District,  
Shui Xiang Yuan,  
Building 6, Unit 3, Door 102  
266011 Qingdao, China

Phone number: 0086 532 8561 1600

### HEADQUARTERS:

The Cloud, RM 102 , 1/F,  
111 Tung Chau Street  
Tai Kok Tsui  
999077 Hong Kong, China

Phone number: +86 156 5320 3135

### CONTACT US

[contact@sinoconcept.com](mailto:contact@sinoconcept.com)