



FRENCH-OWNED COMPANY
WITH MANUFACTURING OPERATIONS IN CHINA

CATALOGUE 2026

Sino Concept is a French-owned
and operated manufacturing
group specialising in the
production of steel, rubber, and
plastic products.

CONTENTS

Durable & Reliable

ROAD & TRAFFIC SAFETY DEVICES

SPEED CUSHIONS..... 04

LANE DIVIDERS 05

GLASS ROAD STUDS 05

ALUMINIUM ROAD STUDS.....06

RUBBER-BASED ROAD STUDS06

PLASTIC ROAD STUDS06

STEEL-BASED ROAD STUDS06

CAR PARK SAFETY MANAGEMENT

SPEED BUMPS 08

ONE-PART SPEED BUMP.....10

SPEED HUMPS.....10

WHEEL STOPS11

HGV WHEEL STOP.....13

FLOOR BIKE RACKS.....14

PARKING BARRIER (STANDARD).....16

PARKING BARRIER (HEAVY DUTY).....16

WALK BEHIND SALT SPREADER 25L16

WALK BEHIND SALT SPREADER 45L16

TRAFFIC CONTROL EQUIPMENT

TRAFFIC SAFETY CONES.....18

METAL ROADWORKS BEACONS 20

PLASTIC ROADWORKS BEACON 20

SCANDINAVIAN DELINEATOR PANEL21

BALLAST SANDBAG21

EXPANDABLE STEEL BARRIER 22

MANHOLE SAFETY BARRIER..... 22

EVENT MANAGEMENT

CABLE RAMPS24

MODULAR CABLE RAMPS..... 26

DDA CABLE RAMPS.....28

CABLE PROTECTOR RAMPS - 1200MM 29

HOSE PROTECTOR RAMPS 29

DROP OVERS 30

FLOOR CABLE COVERS..... 30

CROWD CONTROL BARRIERS.....31

CROWD BARRIER STILLAGE31

STREET FURNITURE

BALL-TOP BOLLARDS..... 34

GROOVE BOLLARDS..... 34

DECORATIVE BOLLARDS 34

MITRE-TOP BOLLARDS 35

3 GROOVES BOLLARDS 35

DOME-TOP BOLLARDS 35

LOCKABLE REMOVABLE BOLLARD SOCKET 35

FLAT-TOP BOLLARDS 35

CROSS PEDESTRIAN GUARDRAIL..... 36

DIAMOND PATTERN 36

PEDESTRIAN GUARDRAIL..... 36

SHANGHAI PEDESTRIAN GUARDRAIL 36

BALL-TOP PEDESTRIAN GUARDRAIL 36

DECORATIVE OUTDOOR TRASH BINS..... 38

HOOPED PERIMETER BARRIERS..... 38

LAMP POST PROTECTOR HOOPS..... 39

POLE AND COLUMN PROTECTORS 39

Road and Traffic Safety Devices

SPEED CUSHIONS04

LANE DIVIDERS05

GLASS ROAD STUDS.....05

ALUMINIUM ROAD STUDS06

RUBBER-BASED ROAD STUDS06

PLASTIC ROAD STUDS.....06

STEEL-BASED ROAD STUDS06

SPEED CUSHIONS



Durable and Eco-Friendly: Speed cushions made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, and weatherproof. Provides long-lasting protection, ideal for mid-sized parking areas.

ACCESSORIES:



SKID-PROOF SURFACE
Non-slip surface for better grip.

REFLECTIVE FILMS
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.

HEAVY-DUTY HARDWARE
Premium-quality screws and plastic anchors – rust-proof and highly durable.

AVAILABLE IN BLACK
Other colours on request.

COMPANY NAME OR LOGO
Can be moulded-in for easy identification.

CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS (L*W*H)
4 Parts (2 right corners + 2 left corners)	2000 x 1800 x 65 mm (6.56' x 5.9' x 2.56')
6 Parts (2 right corners + 2 left corners + 2 middle parts)	3000 x 1800 x 65 mm (9.84' x 5.9' x 2.56')



ACCESSORIES:



LANE DIVIDERS

PLASTIC-RUBBER COMPOSITE
Cost-effective, UV-resistant, and very sturdy.

REFLECTIVE FILMS
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.

360° SOLID GLASS ROAD STUD (PREMIUM VERSION)
Increases visibility and safety at night.

AVAILABLE IN BLACK
Other colours on request.

TYPE	DIMENSIONS (L*W*H)	GLASS ROAD STUDS
Eco (without road stud)	1000 x 130 x 50 mm (3.3' x 5" x 2")	/
Premium (with road stud)	1000 x 130 x 50 mm (3.3' x 5" x 2")	Ø 50 mm (Ø1.97")

GLASS ROAD STUDS



TEMPERED GLASS CONSTRUCTION
Durable, long-lasting, with excellent performance after installation.

AVAILABLE IN VARIOUS COLOURS
Different colours to improve visibility in various environments.

360° VISIBILITY
Optimal visibility in low light conditions.

EN 1463
EN 1463 STANDARD COMPLIANT
Ensures high performance and durability according to EN 1463 standards.

TYPE	DIFFERENCE	DIMENSIONS (D*H)
Glass road stud - Small	Recycled rubber for the base	Ø 50 x 55 mm (2" x 2.2")
Glass road stud - Large	Only tempered glass	Ø 100 x 50 mm (4" x 2")



ALUMINIUM ROAD STUDS

TYPE	DIMENSIONS (L*W*H)	MAX. LOAD
Heavy-duty	100 x 100 x 75 mm (4" x 4" x 3")	20 to 30 tons
Standard	100 x 100 x 75 mm (4" x 4" x 3")	10 tons



PLASTIC ROAD STUDS

DIMENSIONS (L*W*H)	MAX. LOAD
100 x 100 x 20 mm (4" x 4" x 0.8")	5 to 10 tons




RUBBER-BASED ROAD STUDS

DIMENSIONS (H*W*T)
145 x 86 x 70 mm (5.7" x 3.4" x 2.75")



STEEL-BASED ROAD STUDS

TYPE	DIMENSIONS (L*W*H)
One side	110 x 50 x 70 mm (4.3" x 2" x 2.8")
Two sides	120 x 50 x 70 mm (4.7" x 2" x 2.8")

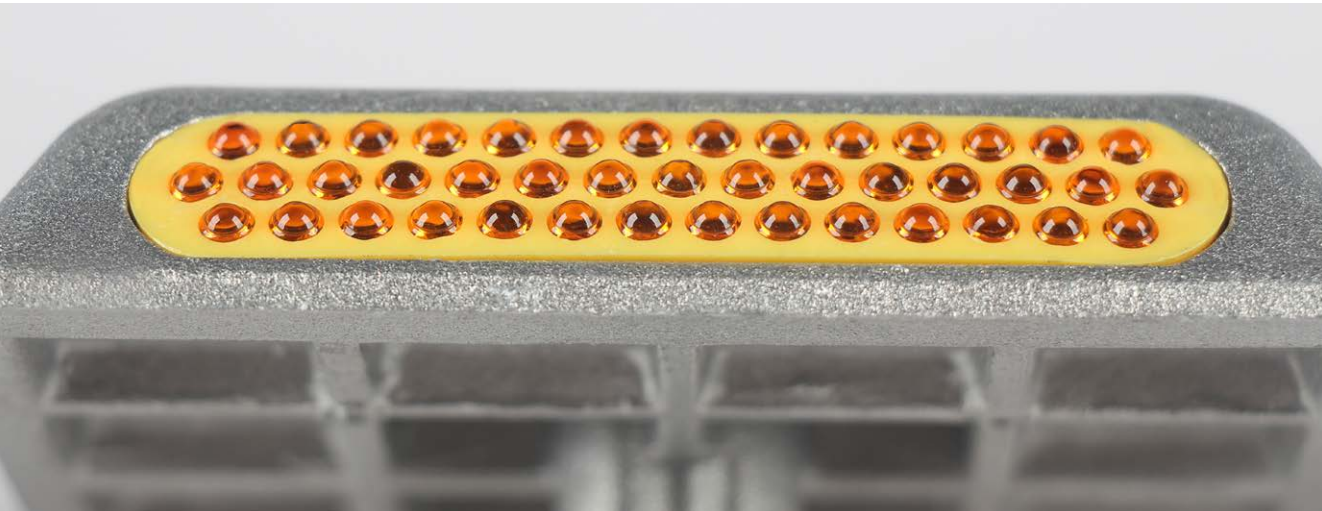

Car Park Safety Management

SPEED BUMPS	08
ONE-PART SPEED BUMP	10
SPEED HUMPS	10
WHEEL STOPS.....	11
HGV WHEEL STOP	13
FLOOR BIKE RACKS	14
PARKING BARRIER (STANDARD)	16
PARKING BARRIER (HEAVY DUTY)	16
WALK BEHIND SALT SPREADER 25L	16
WALK BEHIND SALT SPREADER 45L	16

SPEED BUMPS



20
km/h

50 mm

10
km/h

70 mm



PARTS & ACCESSORIES:



End Caps



Yellow
Middle parts



Black
Middle parts



M12 Coach
Screws, PE
Plastic Anchors

HEIGHT	PART	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
50 mm	Middle part	500 x 350 x 50 mm (20" x 14" x 2")	Ø 30 mm (Ø 1.18")
50 mm	End cap	250 x 350 x 50 mm (10" x 14" x 2")	Ø 30 mm (Ø 1.18")
70 mm	Middle part	500 x 400 x 70 mm (20" x 16" x 2.76")	Ø 35 mm (Ø 1.38")
70 mm	End cap	250 x 400 x 70 mm (10" x 16" x 2.76")	Ø 35 mm (Ø 1.38")



YELLOW MOULDED-IN COVER

Built into the speed bump to stay bright with no peeling or fading. Yellow stays yellow.




INTERLOCKING SYSTEM

Male and female connectors to prevent movement and allow quick installation.



2-IN-1 PRODUCT

Built-in channels for cable protection.



180° GLASS BEAD REFLECTORS

Highly visible in all conditions.





ONE-PART SPEED BUMP




20
km/h




PARTS / ACCESSORIES:

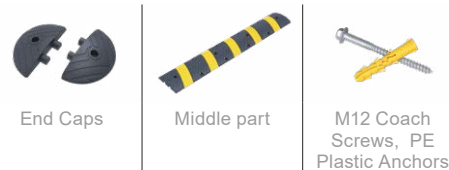


SKID-PROOF SURFACE
Non-slip surface for better grip.



180° GLASS BEAD REFLECTORS
Highly visible in all conditions.



CONVENIENT STORAGE
Screws and anchors stored underneath for easy setup.



2-IN-1 PRODUCT
Built-in channels for cable protection.

TYPE	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
Middle part	1830 x 300 x 50 mm (6" x 12" x 2")	Ø 30 mm (Ø 1.18")
End cap	150 x 300 x 50 mm (6" x 12" x 2")	/

SPEED HUMPS



PARTS / ACCESSORIES:



SKID-PROOF SURFACE
Non-slip surface for better grip.



INTERLOCKING SYSTEM
Male and female connectors to prevent movement and allow quick installation.



2-IN-1 PRODUCT
Built-in channels for cable protection.

HEIGHT	MIDDLE PART DIMENSIONS (L*W*H)	END CAP DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
30 mm (1.2")	500 x 600 x 30 mm (20" x 24" x 1.18")	250 x 600 x 30 mm (10" x 24" x 1.18")	/
50 mm (2")	500 x 600 x 50 mm (20" x 24" x 1.97")	250 x 600 x 50 mm (10" x 24" x 1.97")	2 x Ø 30 mm (Ø 1.18")
50 mm (2")	500 x 900 x 50 mm (20" x 35" x 1.97")	250 x 900 x 50 mm (10" x 35" x 1.97")	2 x Ø 30 mm (Ø 1.18")
70 mm (3")	500 x 900 x 70 mm (20" x 35" x 2.76")	250 x 900 x 70 mm (10" x 35" x 2.76")	2 x Ø 45 mm (Ø 1.77")
70 mm (3")	500 x 1200 x 70 mm (20" x 47" x 2.76")	250 x 1200 x 70 mm (10" x 47" x 2.76")	2 x Ø 45 mm (Ø 1.77")

WHEEL STOPS



ACCESSORIES:




Durable and Eco-Friendly: Car Park Wheel Stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

TYPE	DIMENSIONS (L*W*H)	REFLECTIVE FILM COLOURS
550 mm (2')	550 x 150 x 100 mm (2' x 6" x 4")	Yellow, white
900 mm (3')	900 x 150 x 100 mm (3' x 6" x 4")	Yellow, white
1220 mm (4')	1220 x 150 x 100 mm (4' x 6" x 4")	Yellow, white
1830 mm (6')	1830 x 150 x 100 mm (6' x 6" x 4")	Yellow, white




REFLECTIVE FILMS
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



HEAVY-DUTY STRUCTURE
Thick walls and V-shaped ribs for maximum strength in tough conditions.



CONVENIENT STORAGE
Screws, anchors, and caps stored underneath for easy setup.

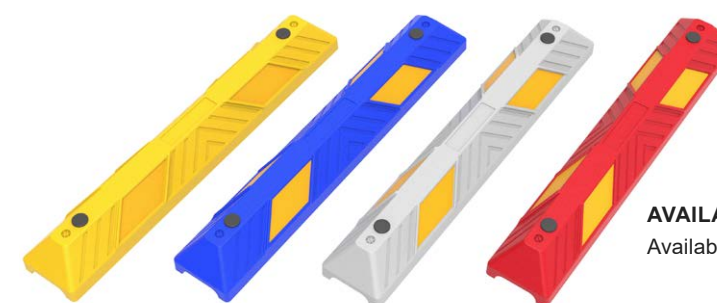

AVAILABLE IN MORE COLOURS
Available colours: Yellow, blue, white, red, etc.



HGV WHEEL STOP



ACCESSORIES:




M12 Coach
Screws, PE
Plastic Anchors

MATERIAL

Plastic-Rubber composite

DIMENSIONS (L*W*H)

1000 x 300 x 150 mm (39.4" x 11.8" x 5.9")



CONVENIENT STORAGE

Screws and anchors stored underneath for easy setup.




INTEGRATED HIGH-VISIBILITY MARKING

Mould-in yellow marking for enhanced visibility and safety.


EFFICIENT IMPACT DISTRIBUTION

Full-surface contact for stability and even impact distribution for durability.

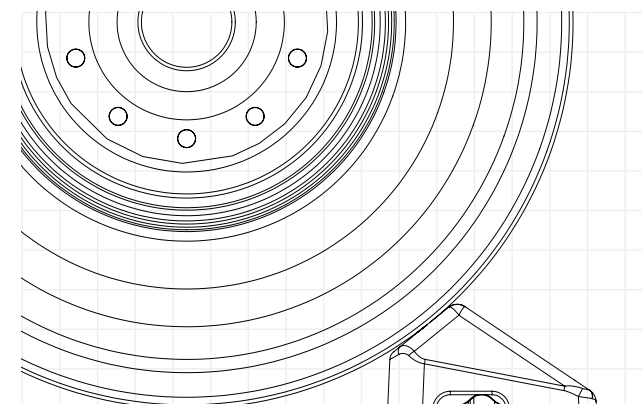

CONVENIENT HANDLES
Easy to carry and to install.

FLOOR BIKE RACKS

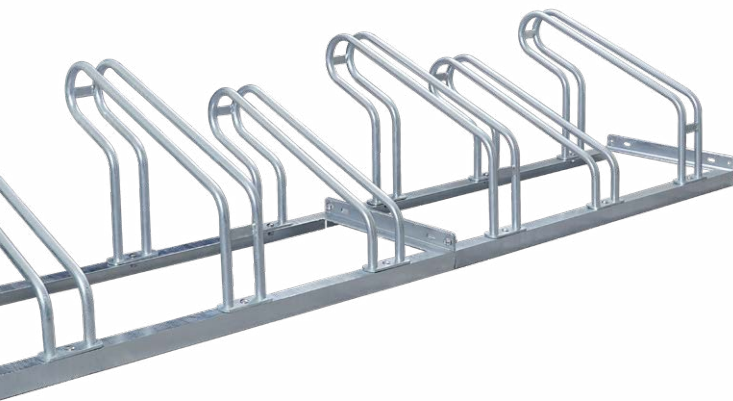

HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.






SPACE-SAVING
Low and high hoops save space for bike parking.



LOCKABLE OPTIONS
Securely lock bike frames for extra safety.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

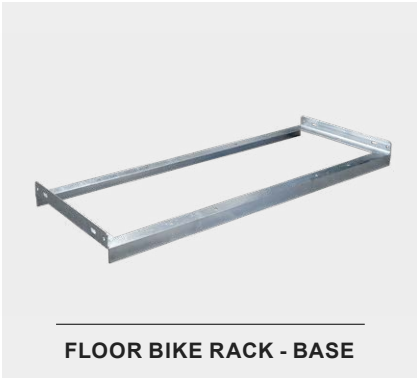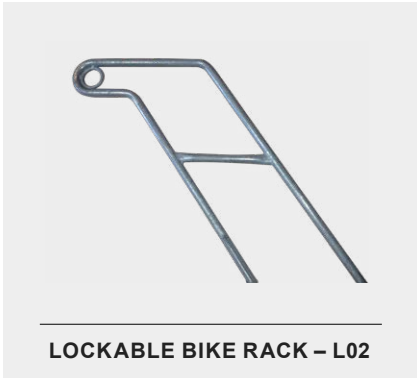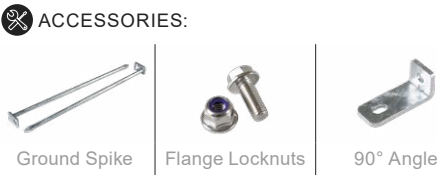

TYPE	TUBE DIAMETER	MAX. TYRE WIDTH
S01, S02, S03	Ø 18 mm (Ø 0.7")	45 mm (1.8")

TYPE	AVAILABLE LENGTHS	WIDTH
BASE	700 mm (27.6"), 1000 mm (39.4"), 1050 mm (41.3"), 1100 mm (43.3"), etc	395 mm (15.6")





■ PARKING BARRIER (STANDARD)

Material: Mild steel tube.
Surface Treatment: Fully hot-dipped galvanised (after welding).



■ PARKING BARRIER (HEAVY DUTY)

Material: Mild steel tube.
Surface Treatment: Fully hot-dipped galvanised (after welding).



TYPE	WIDTH	HEIGHT
STANDARD	700 mm	430 mm
HEAVY DUTY	880 mm	440 mm



■ WALK BEHIND SALT SPREADER 25L

Hopper material: Polypropylene (PP).
Frame material: Steel tubing and powder-coated anti-corrosion finish.
Bolts, rods and linkages: Steel and electro-galvanised.
Spreader gear: Nylon.

TYPE	DIMENSIONS (L*W*H)	SPREADING WIDTH
Salt spreader 25 L	1120 mm × 560 mm × 850 mm	3000 mm
Salt spreader 45 L	1110 mm × 670 mm × 835 mm	4000 mm



■ WALK BEHIND SALT SPREADER 45L

Hopper material: Polypropylene (PP).
Frame material: Steel tubing and powder-coated anti-corrosion finish.
Spreader gear, bolts, rods and linkages: 304 stainless steel.

Traffic Control Equipment

TRAFFIC SAFETY CONES 18

METAL ROADWORKS BEACONS 20

PLASTIC ROADWORKS BEACON 20

SCANDINAVIAN DELINEATOR PANEL..... 21

BALLAST SANDBAG 21

EXPANDABLE STEEL BARRIER..... 22

MANHOLE SAFETY BARRIER 22

TRAFFIC SAFETY CONES



MAXI GRIP HANDLE
Handle with groove and textured grip for easy, efficient use, even with gloves.



FILM PROTECTION
Reflective films are embedded with a 1 mm recess to prevent tearing.



UNIQUE STACKING SYSTEM
Cone trunks stack apart, preventing sticking and protecting reflective films.


TYPE	HEIGHT	BASE DIMENSIONS	REFLECTIVE SHEETING HEIGHT	WEIGHT
300 mm	300 mm (11.8")	215 x 215 mm (8.5" x 8.5")	100 mm (3.9") × 1	0.5 kg (1.1 lbs)
500 mm	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") × 2	1.1 kg (2.4 lbs)
500 mm (weighted)	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") × 2	1.8 kg (4 lbs)
750 mm	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") × 2	2 kg (4.4 lbs)
750 mm (weighted 1)	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") × 2	3.2 kg (7.0 lbs)
750 mm (weighted 2)	750 mm (29.5")	365 x 365 mm (14.4" x 14.4")	150 mm (5.9") × 2	4.2 kg (9.3 lbs)
750 mm (highway)	750 mm (29.5")	400 x 400 mm (15.7" x 15.7")	150 mm (5.9") × 2	4.2 kg (9.3 lbs)




300 MM



500 MM

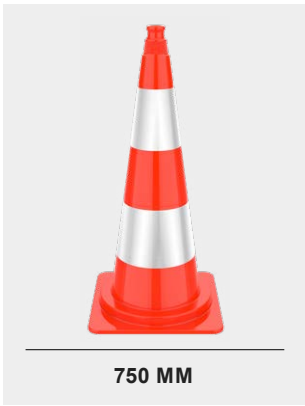

750 MM

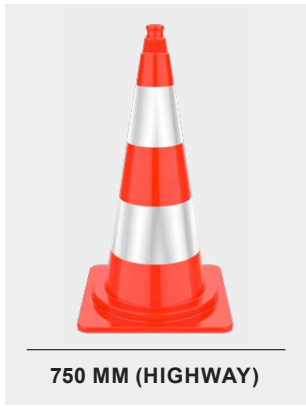

750 MM (HIGHWAY)



500 MM (WEIGHTED)



750 MM (WEIGHTED 1)




750 MM (WEIGHTED 2)



MORE COLOURS...



METAL ROADWORKS BEACONS



HIGHLY REFLECTIVE SHEETINGS
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).



GALVANISED STEEL ANGLE & PLATE
Ensures durability and corrosion resistance.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.



ANGLED END
Allows fast and easy installation, even on hard ground.

HEIGHT	GALVANISED STEEL ANGLE	GALVANISED STEEL PLATE
1100 mm (43")	20 x 15 mm (0.78" x 0.59")	150 x 375 mm (5.9" x 14.7")

PLASTIC ROADWORKS BEACON



CONVENIENT HANDLE
Easy to carry and install.



HIGHLY REFLECTIVE SHEETINGS
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).



DIRECTIONAL ARROW
Helps you to position the beacon in the correct direction.



COMPANY NAME OR LOGO
Can be moulded-in for easy identification.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Recycled high-density polyethylene (HDPE)	1300 x 280 x 60 mm (51" x 11" x 2.4")	1000 x 250 mm (39" x 10")

SCANDINAVIAN DELINEATOR PANEL



HIGHLY REFLECTIVE SHEETINGS
Fluo Engineering-Grade (RA1)
Fluo High-Intensity Prismatic Grade (RA3).



DIRECTIONAL ARROW
Helps you to position the beacon in the correct direction.




CONVENIENT HANDLE
Easy to carry and install.




SAVE PACKING STORAGE
Stackable design saves space, prevents slipping, and keeps beacons organised.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Polypropylene (PP)	1000 x 225 x 22 mm (39.5" x 8.85" x 0.87")	800 x 190 mm (31.5" x 7.5")

BALLAST SANDBAG



DOUBLE-STITCHED SEAMS
Strong stitching for long-lasting use.



HEAVY-DUTY ROPE
Easy to carry and handle.



8 ALUMINIUM EYELETS
Corrosion-resistant aluminium for a longer lifespan.



COMPANY NAME OR LOGO
Screen-printed logo for easy identification.

MATERIAL	DIMENSIONS (L*W)	DENSITY	CAPACITY
PVC-coated fabric	600 x 400mm (24" x 15")	640 g/m ²	15 kg (33 lbs) – delivered empty

EXPANDABLE STEEL BARRIER



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.




INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH	FINISHING TREATMENT
1000 mm (39")	Folded: 200 mm (8"), Unfolded: 2.85 m (9')	Anti-UV powder coating

MANHOLE SAFETY BARRIER

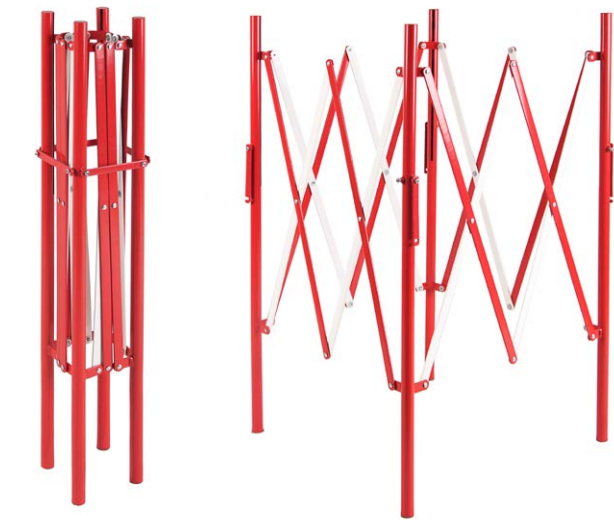

SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.



INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH & WIDTH	FINISHING TREATMENT
1000 mm (39")	Folded: 150 x 150 mm (6" x 6"), Unfolded: 1.5 x 1.5 m (4.9' x 4.9')	Anti-UV powder coating

Event Management

CABLE RAMPS.....	24
MODULAR CABLE RAMPS	26
DDA CABLE RAMPS	28
CABLE PROTECTOR RAMPS - 1200MM.....	29
HOSE PROTECTOR RAMPS.....	29
DROP OVERS.....	30
FLOOR CABLE COVERS	30
CROWD CONTROL BARRIERS	31
CROWD BARRIER STILLAGE	31

■ CABLE RAMPS

Material of the base:

- 1. Standard version:** Plastic-Rubber composite as a more economical option.
- 2. Heavy-duty version:** Vulcanised rubber for flexibility and durability.

Both are REACH compliant, odourless, and built to last.

45° CORNER SECTIONS:



TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
2 Channels	990 x 240 x 45 mm (39" x 9.5" x 1.8")	30 x 32 mm (1.18" x 1.26")
3 Channels	900 x 500 x 70 mm (35.5" x 20" x 2.75")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")
5 Channels	900 x 500 x 50 mm (35.5" x 20" x 2")	38 x 32 mm (1.5" x 1.26")



THICK YELLOW LID

UV-stabilised PE with a non-slip surface to reduce tripping risks.



REINFORCED STRUCTURE

Premium material to reinforce key stress points like hinges and connectors.





45° LEFT TURN / RIGHT TURN (2, 3 AND 5 CHANNELS)

Helps create right or left turns, keeping walking spaces safe.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.

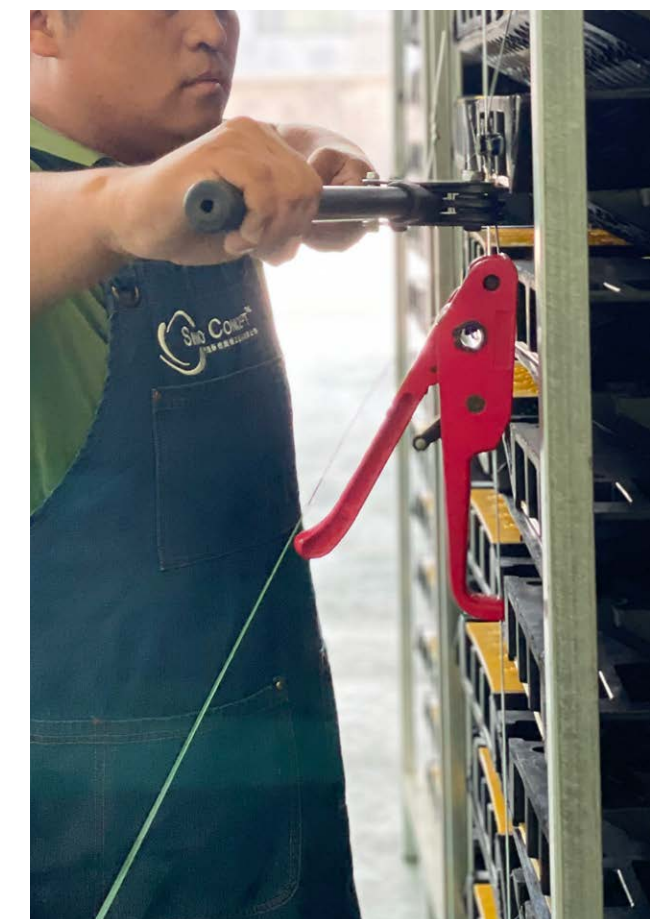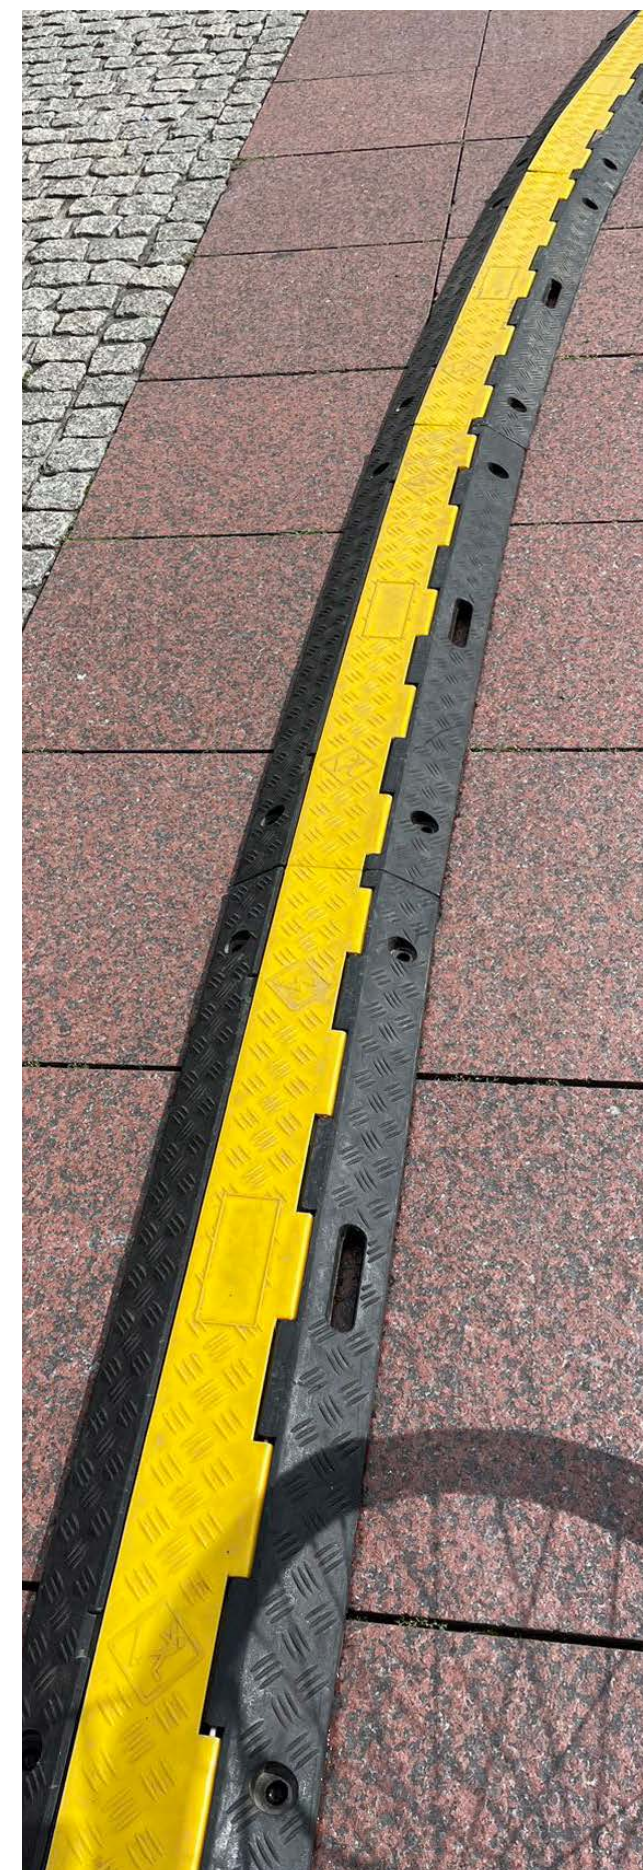


MODULAR CABLE RAMPS

Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

COMPATIBLE PRODUCT / ACCESSORIES:



5 Channels
Cable ramp



Rubber
H-Connectors

TYPE	DIMENSIONS (L*W*H , EXCLUDING CONNECTORS)	CHANNEL DIMENSIONS (W*H)
Middle part	895 x 370 x 50 mm (35.2" x 14.6" x 2")	37.5 x 35 mm (1.48" x 1.38")
Standard ramp	895 x 140 x 50 mm (35.2" x 5.5" x 2")	/
Gentle slope ramp	895 x 500 x 50 mm (35.2" x 19.7" x 2")	/
Half gentle slope ramp	447.5 x 500 x 50 mm (17.6" x 19.7" x 2")	/



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.




SKID-PROOF SURFACE

Non-slip surface for better grip.



GENTLE SLOPE RAMP

5° incline for smooth and easy access for wheelchairs and pedestrians.

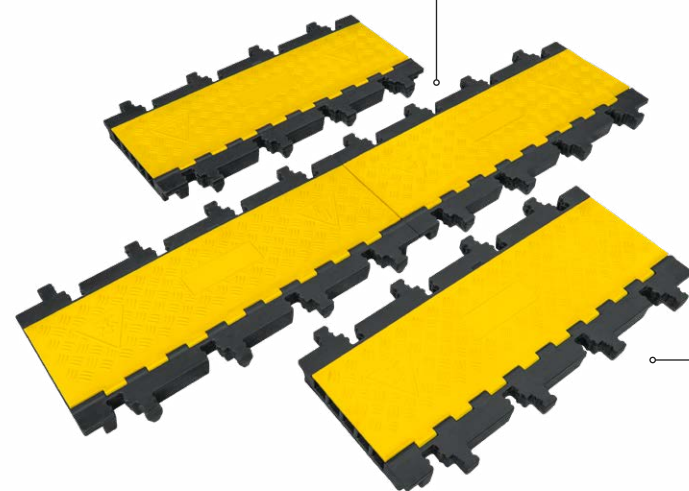

FLEXIBLE MODULAR DESIGN


The modular cable ramp allows for easy and flexible assembly to suit various needs.



MIDDLE PART



STANDARD RAMP

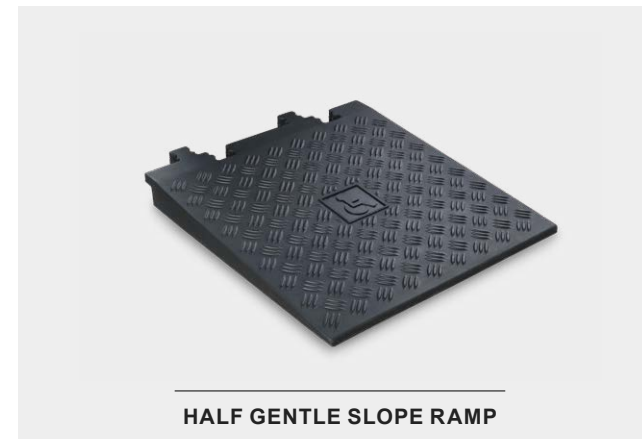

HALF GENTLE SLOPE RAMP



GENTLE SLOPE RAMP



COMPATIBLE WITH 5-CHANNEL CABLE RAMP

The middle modular cable ramp seamlessly connects with our 5-channel cable ramps using H-Connectors, ensuring a secure and continuous cable protection system.



DDA CABLE RAMPS

Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

COMPATIBLE PRODUCT :



BUILT-IN HANDLE

Easy to transport and reduces fatigue, saving time during installation and storage.



NYLON ROD

Integrated nylon rod securely connects the base and yellow cover, preventing detachment.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.



DDA/ADA COMPLIANT

Meets the requirements of the DDA and ADA standards, ensuring accessibility.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
2 Channels	990 x 915 x 45 mm (39" x 36" x 2")	30 x 32 mm (1.18" x 1.26")
3 Channels	450 x 1472 x 70 mm (17.7" x 57.9" x 2")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")
5 Channels	450 x 1090 x 50 mm (17.7" x 42.9" x 2")	38 x 32 mm (1.5" x 1.26")




CABLE PROTECTOR RAMPS - 1200MM



SKID-PROOF SURFACE

Non-slip surface for better grip.



CABLE COVER BASE

Designed to receive two cables up to Ø 20 mm (Ø 0.8") and one cable up to Ø 40 mm (Ø 1.6").



COMPANY NAME OR LOGO

Can be moulded-in for easy identification.



CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)

1200 x 200 x 60 mm (47" x 8" x 2.5")

MAX. CABLE DIAMETER

1 x Ø 42 mm (Ø 1.65") and 2 x Ø 20 mm (Ø 0.8")

HOSE PROTECTOR RAMPS



BUILT-IN HANDLE

Easy to transport and reduces fatigue, saving time during installation and storage.




REFLECTIVE FILMS

Embedded thermoplastic reflective road marking films to enhance visibility and safety.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.



CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)

850 x 300 x 85 mm (33" x 12" x 3.3")

CHANNEL DIMENSIONS (W*H)

90 x 70 mm (3.54" x 2.76")

MAX. WEIGHT CAPACITY

9,000 kg (20,000 lbs) per axle

970 x 300 x 130 mm (38" x 12" x 5")

110 x 110 mm (4.33" x 4.33")

20,000 kg (44,000 lbs) per axle

■ DROP OVERS



OPTIONAL COLOURS:



SKID-PROOF SURFACE
Non-slip surface for better grip.



MADE OF THERMOPLASTIC POLYURETHANE
Flexible material that perfectly fits uneven floors.




INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.



ANTI-SLIP PADS
Improves grip on smooth surfaces.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
Small	914 x 135 x 22 mm (36" x 5.25" x 0.87")	40 x 14 mm (1.57" x 0.55")
Large	914 x 280 x 40 mm (36" x 11" x 1.57")	104 x 30 mm (4" x 1.25")


■ FLOOR CABLE COVERS



SKID-PROOF SURFACE
Non-slip surface for better grip.



1 CHANNEL - TOP SLIT
To install the cable from the top.



3 CHANNELS - TOP & BOTTOM SLIT
To install the cable from the top & bottom.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS	MAX. CABLE DIAMETER
1 Channel	10,000 x 100 x 30 mm (33' x 4" x 1.2")	Ø 20 mm (Ø 0.8")
3 Channels	4,000 x 160 x 50 mm (13' x 6" x 2")	1 x Ø 40 mm (Ø 1.6") and 2 x Ø 20 mm (Ø 0.8")



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.




PATENTED HANDLE
Allows carrying two barriers at once (unique on the market).



REINFORCED INTERLOCKING SYSTEM
Extra-thick 5 mm connectors for strong and stable use.

TYPE	DIMENSIONS (L*H)	TUBE DIAMETERS
Crowd barrier - 1 Metre	1000 x 1090 mm (39" x 43")	Frame: Ø 32 mm (Ø 1.3"), 6 Inner rails: Ø 16 mm (Ø 0.6")
Crowd barrier - 2 Metres	2000 x 1090 mm (79" x 43")	Frame: Ø 32 mm (Ø 1.3"), 14 Inner rails: Ø 16 mm (Ø 0.6")

■ CROWD BARRIER STILLAGE

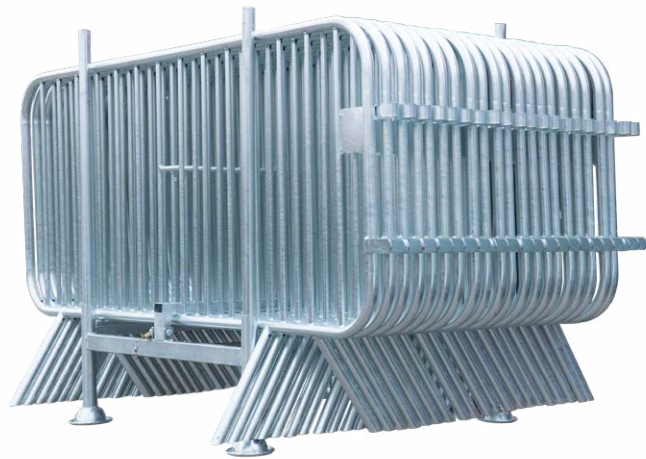

SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.



SINGLE LOCK SYSTEM
Simple and effective, prevents the loss of crowd control barriers.



STACKING SYSTEM
Stable stacking for easy management.

APPLICABLE PRODUCTS:




DIMENSIONS (L*W*H)	CONTAINS
980 x 910 x 1200 mm (38.6" x 35.8" x 47.2")	20 Pieces of crowd barriers




Street Furniture

BALL-TOP BOLLARDS	34
GROOVE BOLLARDS	34
DECORATIVE BOLLARDS.....	34
MITRE-TOP BOLLARDS	35
3 GROOVES BOLLARDS.....	35
DOME-TOP BOLLARDS.....	35
LOCKABLE REMOVABLE BOLLARD SOCKET	35
FLAT-TOP BOLLARDS	35
CROSS PEDESTRIAN GUARDRAIL	36
DIAMOND PATTERN.....	36
PEDESTRIAN GUARDRAIL	36
SHANGHAI PEDESTRIAN GUARDRAIL.....	36
BALL-TOP PEDESTRIAN GUARDRAIL	36
DECORATIVE OUTDOOR TRASH BINS.....	38
HOOPED PERIMETER BARRIERS	38
LAMP POST PROTECTOR HOOPS	39
POLE AND COLUMN PROTECTORS.....	39

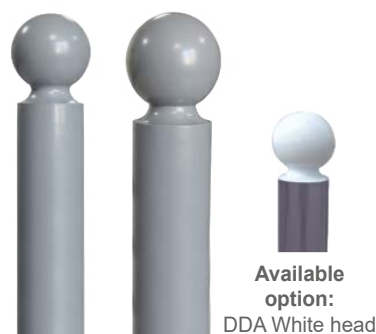

Available
option:
DDA White head

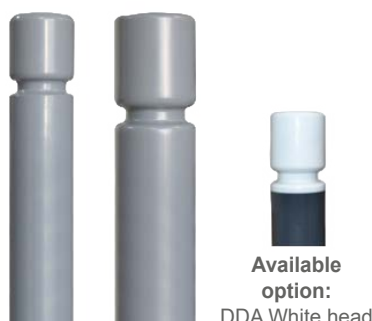

Available
option:
DDA White head



Available
option:
DDA White head

BALL-TOP BOLLARDS

GROOVE BOLLARDS


DECORATIVE BOLLARDS



All our metal products are available in various surface and finishing treatments:


- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating

TYPE	DIAMETER	HEIGHT
Ball-top bollard	Ø76 mm / 114 mm	1200 mm / 1500 mm
Groove bollard	Ø76 mm / 102 mm	1200 mm / 1500 mm
Decorative bollard	Ø60 mm	1200 mm / 1500 mm

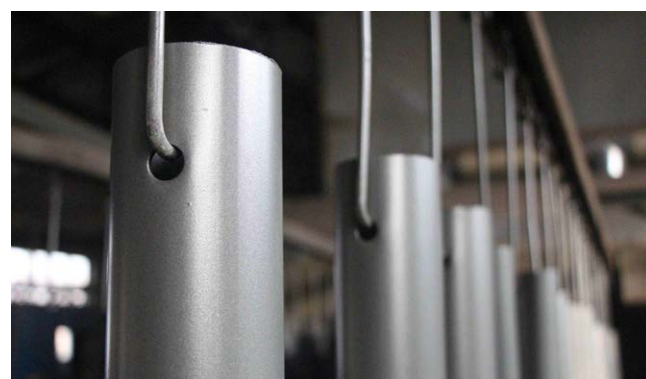


Available
option:
DDA White head

3 GROOVES BOLLARDS

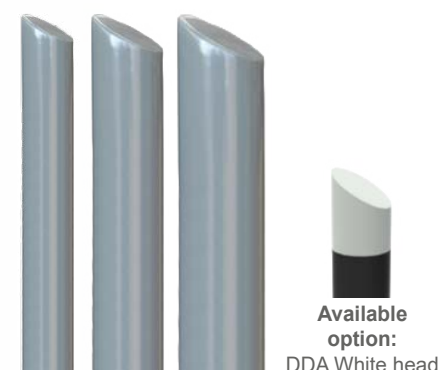

Available
option:
DDA White head

MITRE-TOP BOLLARDS

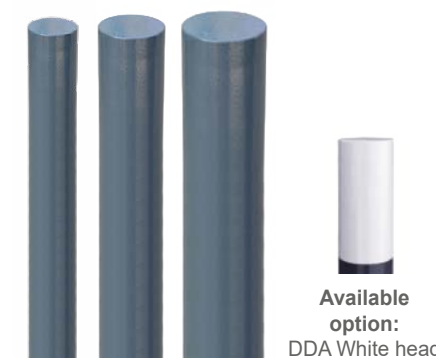

Available
option:
DDA White head

FLAT-TOP BOLLARDS



Available
option:
DDA White head

DOME-TOP BOLLARDS

TYPE	DIAMETER	HEIGHT
3 Grooves bollard	Ø76 mm	1200 mm / 1500 mm
Flat-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm
Mitre-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm
Dome-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm

LOCKABLE REMOVABLE BOLLARD SOCKET

Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Finishing Treatment
Anti-UV powder coating.



TYPE	DIAMETER	HEIGHT
Lockable removable bollard socket	Ø76 mm / 102 mm	275 mm



Ø76 mm

Ø102 mm



**CROSS PEDESTRIAN
GUARDRAIL**



**SHANGHAI PEDESTRIAN
GUARDRAIL**

TYPE	HEIGHT	LENGTH
Cross pedestrian guardrail	1100 mm	1640 mm / 840 mm
Shanghai pedestrian guardrail	1250 mm	1500 mm / 1000 mm



All our metal products are available in various surface and finishing treatments:

- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating



**DIAMOND PATTERN
PEDESTRIAN GUARDRAIL**



**BALL-TOP PEDESTRIAN
GUARDRAIL**

TYPE	HEIGHT	LENGTH
Diamond pattern pedestrian guardrail	1100 mm	1640 mm / 840 mm
Ball-top pedestrian guardrail	1100 mm	1640 mm / 840 mm



DECORATIVE OUTDOOR TRASH BINS



Material
Mild steel tube.

Surface Treatment
Options 1: Zinc-rich primer powder.
Options 2: Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	DIAMETER	HEIGHT	CAPACITY
Trash can	Ø350 mm	780 mm	50 L

HOOPED PERIMETER BARRIERS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.

Customise your hoop barriers
with our different options:

- CROSSBAR**
For an increased resistance and safety
- BASE PLATE**
To be fixed directly to surface for easy install

TYPE	LENGTH	HEIGHT
Surface mounted	1000, 1500, 2000 mm	1000 mm
Embedded	1000, 1500, 2000 mm	1300 mm

LAMP POST PROTECTOR HOOPS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	HEIGHT	WIDTH
Surface mounted	690 mm	560 mm
Embedded	870 mm	560 mm

POLE AND COLUMN PROTECTORS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	LENGTH	WIDTH	HEIGHT
Surface mounted	600 mm	600 mm	500 mm
Embedded	600 mm	600 mm	680 mm



FRENCH-OWNED COMPANY
WITH MANUFACTURING OPERATIONS IN CHINA

THANK YOU FOR YOUR INTEREST IN OUR PRODUCTS!

For more products and details, please visit our website:

<https://www.sinoconcept.com>



PRODUCTION & OPERATIONS CENTRE:

27 Ping Xiang Road, Shibe District,
Shui Xiang Yuan,
Building 6, Unit 3, Door 102
266011 Qingdao, China

Phone number: 0086 532 8561 1600

HEADQUARTERS:

The Cloud, RM 102 , 1/F,
111 Tung Chau Street
Tai Kok Tsui
999077 Hong Kong, China

Phone number: +86 156 5320 3135

CONTACT US

contact@sinoconcept.com