



CATALOGUE

2026

Traffic Safety & Site Equipment

Designed for professional importers



 www.sinoconcept.com

 contact@sinoconcept.com

A WORD FROM THE FOUNDER



I founded Sino Concept with a clear objective: to offer **factory-direct pricing, European quality standards, and clear product specifications.**

I have been living and working in China since **2008**, which allows direct, daily involvement with factories, production, and quality control. Decisions are made on site, with no unnecessary intermediaries.


Our goal is simple:

you focus on sales and distribution, we take care of design, production, and logistics.

Thank you for working with Sino Concept!

Félix Bizouard

Founder & Managing Director



WHO WE ARE

- ✓ Founded in 2009, we design and supply traffic safety and urban equipment
- ✓ In-house product design
- ✓ Long-term manufacturing partners in China
- ✓ Operations based in Qingdao, China
- ✓ Head office registered in Hong Kong

WHY OUR CUSTOMERS WORK WITH US



FACTORY-DIRECT
PRICING



EUROPEAN
STANDARDS



REACH
COMPLIANT
MATERIALS



PRODUCTS DESIGNED
BY OUR TEAM,
NOT COPIED



SAME QUALITY FROM
ONE ORDER
TO THE NEXT



ROAD & TRAFFIC SAFETY DEVICES

SPEED CUSHIONS.....	05
LANE DIVIDERS	06
REFLECTIVE ROAD STUDS.....	06



CAR PARK SAFETY MANAGEMENT

SPEED BUMPS	09
ONE-PART SPEED BUMP.....	11
SPEED HUMPS.....	11
WHEEL STOPS	12
HGV WHEEL STOP.....	14
FLOOR BIKE RACKS	15
PARKING BARRIER.....	17
WALK BEHIND SALT SPREADER	17



TRAFFIC CONTROL EQUIPMENT

TRAFFIC SAFETY CONES.....	19
METAL ROADWORKS BEACONS	21
PLASTIC ROADWORKS BEACON	21
SCANDINAVIAN DELINEATOR PANEL.....	22
BALLAST SANDBAG	22
EXPANDABLE STEEL BARRIER	23
MANHOLE SAFETY BARRIER.....	23

CONTENTS

Durable & Reliable



EVENT MANAGEMENT

CABLE RAMPS	25
MODULAR CABLE RAMPS.....	27
DDA CABLE RAMPS.....	29
CABLE PROTECTOR RAMPS - 1200MM	30
HOSE PROTECTOR RAMPS	30
DROP OVERS	31
FLOOR CABLE COVERS.....	31
CROWD CONTROL BARRIERS.....	32
CROWD BARRIER STILLAGE	32



STREET FURNITURE

BOLLARDS.....	35
LOCKABLE REMOVABLE BOLLARD SOCKET	36
PEDESTRIAN GUARDRAIL.....	37
DECORATIVE OUTDOOR TRASH BINS	39
HOOPED PERIMETER BARRIERS.....	39
LAMP POST PROTECTOR HOOPS.....	40
POLE AND COLUMN PROTECTORS	40

Road & Traffic Safety Devices

SPEED CUSHIONS.....	05
LANE DIVIDERS	06
REFLECTIVE ROAD STUDS.....	06



SPEED CUSHIONS



Durable and Eco-friendly: Speed cushions made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, and weatherproof. Provides long-lasting protection, ideal for mid-sized parking areas.



ACCESSORIES:



Aluminium H-Connectors



M12 Coach Screws, PE Plastic Anchors



PE Plastic Caps



Anti-Slip



UV-Resistant



Heavy-Duty



SKID-PROOF SURFACE

Non-slip surface for better grip.



AVAILABLE IN BLACK

Other colours on request.



REFLECTIVE FILMS

Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



COMPANY NAME OR LOGO

Can be moulded-in for easy identification.



HEAVY-DUTY HARDWARE

Premium-quality screws and plastic anchors – rust-proof and highly durable.



CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS (L*W*H)	WEIGHT
4 Parts (2 right corners + 2 left corners)	2000 x 1800 x 65 mm (6.56' x 5.9' x 2.56'')	160 kg
6 Parts (2 right corners + 2 left corners + 2 middle parts)	3000 x 1800 x 65 mm (9.84' x 5.9' x 2.56'')	250 kg

LANE DIVIDERS



ACCESSORIES:



M12 Coach Screws, PE Plastic Anchors



PE Plastic Caps



PLASTIC-RUBBER COMPOSITE

Cost-effective, UV-resistant, and very sturdy.



REFLECTIVE FILMS

Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



360° SOLID GLASS ROAD STUD (PREMIUM VERSION)

Increases visibility and safety at night.



AVAILABLE IN BLACK

Other colours on request.

TYPE	DIMENSIONS (L*W*H)	GLASS ROAD STUDS	WEIGHT
Eco (without road stud)	1000 x 130 x 50 mm (39.4" x 5" x 2")	/	5 kg
Premium (with road stud)	1000 x 130 x 50 mm (39.4" x 5" x 2")	Ø 50 mm (Ø1.97")	5.5 kg

GLASS ROAD STUDS



TEMPERED GLASS CONSTRUCTION

Durable, long-lasting, with excellent performance after installation.



AVAILABLE IN VARIOUS COLOURS

Different colours to improve visibility in various environments.



360° VISIBILITY

Optimal visibility in low light conditions.



EN 1463 STANDARD COMPLIANT

Ensures high performance and durability according to EN 1463 standards.

TYPE	DIMENSIONS (D*H)
Glass road stud - Small	Ø 50 x 55 mm (2" x 2.2")
Glass road stud - Large	Ø 100 x 50 mm (4" x 2")



ALUMINIUM ROAD STUDS

TYPE	DIMENSIONS (L*W*H)	MAX. LOAD
Heavy-duty	100 x 100 x 75 mm (4" x 4" x 3")	20 to 30 tons
Standard	100 x 100 x 75 mm (4" x 4" x 3")	10 tons



PLASTIC ROAD STUDS

DIMENSIONS (L*W*H)	MAX. LOAD
100 x 100 x 20 mm (4" x 4" x 0.8")	5 to 10 tons




RUBBER-BASED ROAD STUDS

DIMENSIONS (H*W*T)
145 x 86 x 70 mm (5.7" x 3.4" x 2.75")



STEEL-BASED ROAD STUDS

TYPE	DIMENSIONS (L*W*H)
One side	110 x 50 x 70 mm (4.3" x 2" x 2.8")
Two sides	120 x 50 x 70 mm (4.7" x 2" x 2.8")

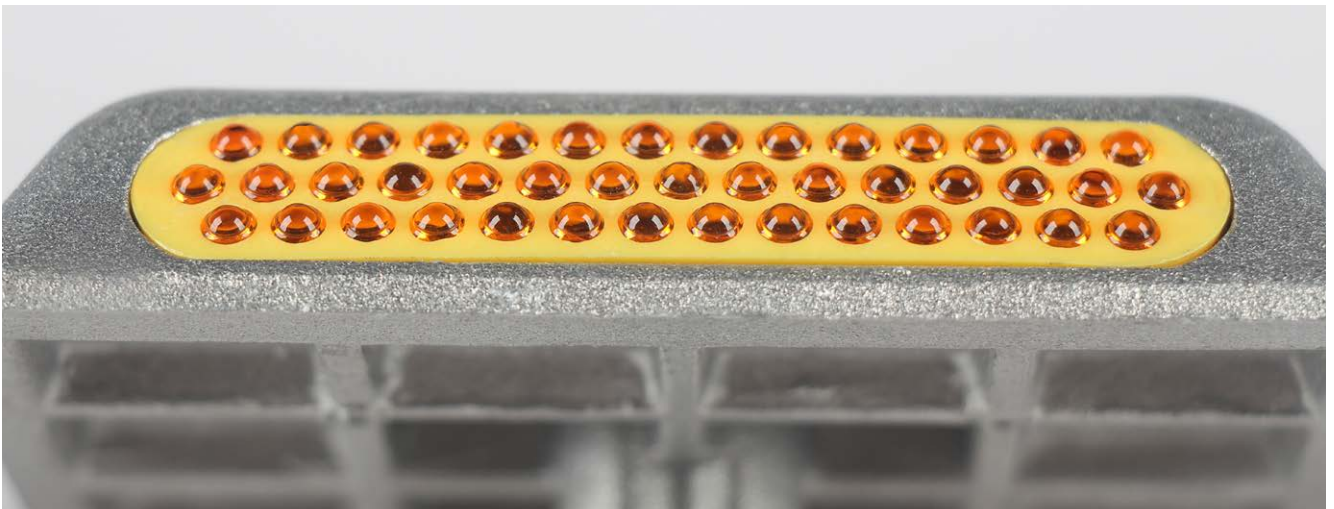

Car Park Safety Management

SPEED BUMPS	09
ONE-PART SPEED BUMP	11
SPEED HUMPS	11
WHEEL STOPS	12
HGV WHEEL STOP	14
FLOOR BIKE RACKS	15
PARKING BARRIER	17
WALK BEHIND SALT SPREADER	17



SPEED BUMPS

1. Standard version: Suitable for light vehicles and light utility vehicles under normal usage conditions. Maximum Load Capacity: 20 tons per axle.

2. Heavy-duty version: Suitable for light utility vehicles, with enhanced durability. Maximum Load Capacity: 25 tons per axle.

PARTS & ACCESSORIES:



HEIGHT	PART	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	WEIGHT (STANDARD / HEAVY-DUTY)
50 mm	Middle part	500 x 350 x 50 mm (20" x 14" x 2")	Ø 30 mm (Ø 1.18")	6 kg / 7 kg
50 mm	End cap	250 x 350 x 50 mm (10" x 14" x 2")	Ø 30 mm (Ø 1.18")	2 kg / 2.5 kg
70 mm	Middle part	500 x 400 x 70 mm (20" x 16" x 2.76")	Ø 35 mm (Ø 1.38")	9 kg / 12 kg
70 mm	End cap	250 x 400 x 70 mm (10" x 16" x 2.76")	Ø 35 mm (Ø 1.38")	3.5 kg / 4.5 kg



YELLOW MOULDED-IN COVER

Built into the speed bump to stay bright with no peeling or fading. Yellow stays yellow.




INTERLOCKING SYSTEM

Male and female connectors to prevent movement and allow quick installation.



2-IN-1 PRODUCT

Built-in channels for cable protection.



180° GLASS BEAD REFLECTORS

Highly visible in all conditions.

ONE-PART SPEED BUMP



MATERIAL: It is made from a heavy-duty Plastic-Rubber composite, which makes it long-lasting. It works well in all weather conditions and on different road surfaces like asphalt, concrete, or block paving.

PARTS / ACCESSORIES:



End Caps



Middle Part



M12 Coach Screws, PE Plastic Anchors

TYPE	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	WEIGHT
Middle part	1830 x 300 x 50 mm (6' x 12" x 2")	Ø 30 mm (Ø 1.18")	20.5 kg
End cap	150 x 300 x 50 mm (6" x 12" x 2")	/	1.5 kg



SKID-PROOF SURFACE

Non-slip surface for better grip.



SKIDPROOF SURFACE

Non-slip surface for better grip.



2-IN-1 PRODUCT

Built-in channels for cable protection.



180° GLASS BEAD REFLECTORS

Highly visible in all conditions.

■ SPEED HUMPS


MATERIAL: Made from robust plastic-rubber composite material, it performs exceptionally well under heavy trucks, cars, and pedestrian usage. Its modular construction ensures suitability for roads of various lengths, providing a neat and professional installation.



✂ PARTS / ACCESSORIES:



End Caps



Middle Parts



M12 Coach Screws, PE Plastic Anchors

HEIGHT	MIDDLE PART DIMENSIONS (L*W*H)	END CAP DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	WEIGHT (END CAP / MIDDLE PART)
30 mm (1.2")	500 x 600 x 30 mm (20" x 24" x 1.18")	250 x 600 x 30 mm (10" x 24" x 1.18")	/	3 kg / 8 kg
50 mm (2")	500 x 600 x 50 mm (20" x 24" x 1.97")	250 x 600 x 50 mm (10" x 24" x 1.97")	2 x Ø 30 mm (Ø 1.18")	4.5 kg / 11 kg
50 mm (2")	500 x 900 x 50 mm (20" x 35" x 1.97")	250 x 900 x 50 mm (10" x 35" x 1.97")	2 x Ø 30 mm (Ø 1.18")	7 kg / 16 kg
70 mm (3")	500 x 900 x 70 mm (20" x 35" x 2.76")	250 x 900 x 70 mm (10" x 35" x 2.76")	2 x Ø 45 mm (Ø 1.77")	7.5 kg / 21 kg
70 mm (3")	500 x 1200 x 70 mm (20" x 47" x 2.76")	250 x 1200 x 70 mm (10" x 47" x 2.76")	2 x Ø 45 mm (Ø 1.77")	9.5 kg / 28 kg



SPEED HUMP 3 CM
(600 mm wide)



SPEED HUMP 5 CM
(600 mm wide)



SPEED HUMP 5 CM
(900 mm wide)



SPEED HUMP 7 CM
(900 mm wide)



SPEED HUMP 7 CM
(1200 mm wide)

WHEEL STOPS



Durable and Eco-friendly: Car Park Wheel Stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

ACCESSORIES:




M12 Coach Screws, PE Plastic Anchors




PP Plastic Caps

TYPE	DIMENSIONS (L*W*H)	REFLECTIVE FILM COLOURS	WEIGHT
550 mm (2')	550 x 150 x 100 mm (2' x 6" x 4")	Yellow, white	4.5 kg
900 mm (3')	900 x 150 x 100 mm (3' x 6" x 4")	Yellow, white	7 kg
1220 mm (4')	1220 x 150 x 100 mm (4' x 6" x 4")	Yellow, white	9 kg
1830 mm (6')	1830 x 150 x 100 mm (6' x 6" x 4")	Yellow, white	13.5 kg



REFLECTIVE FILMS

Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.




HEAVY-DUTY STRUCTURE

Thick walls and V-shaped ribs for maximum strength in tough conditions.



CONVENIENT STORAGE

Screws, anchors, and caps stored underneath for easy setup.

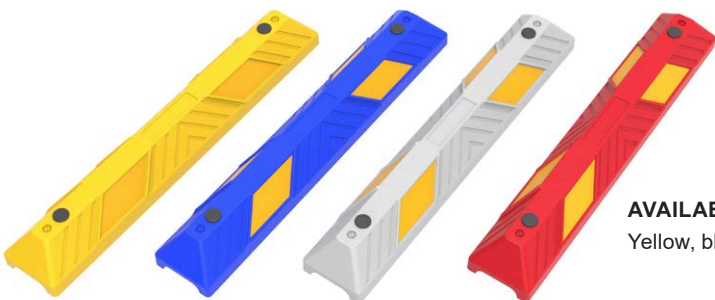

AVAILABLE IN MORE COLOURS

Yellow, blue, white, red, etc.



■ HGV WHEEL STOP



Durable and Eco-friendly: HGV wheel stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.



ACCESSORIES:




M12 Coach
Screws, PE
Plastic Anchors

MATERIAL	DIMENSIONS (L*W*H)	WEIGHT
Plastic-rubber composite	1000 x 300 x 150 mm (39.4" x 11.8" x 5.9")	21 kg



CONVENIENT STORAGE

Screws and anchors stored underneath for easy setup.

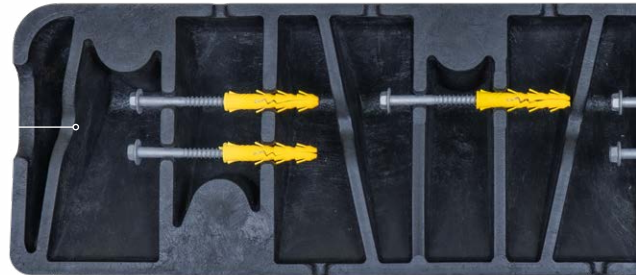


INTEGRATED HIGH-VISIBILITY MARKING

Mould-in yellow marking for enhanced visibility and safety.



EFFICIENT IMPACT DISTRIBUTION


Full-surface contact for stability and even impact distribution for durability.

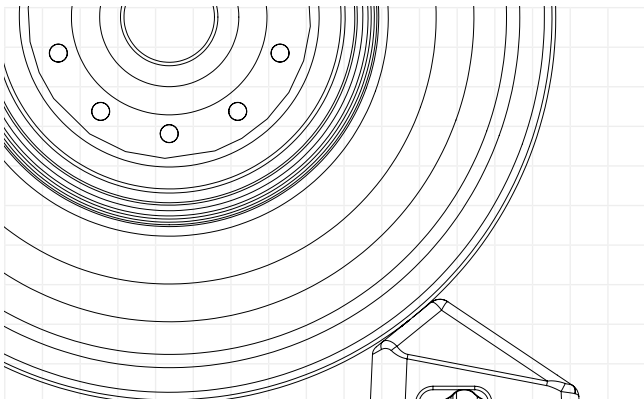

CONVENIENT HANDLES

Easy to carry and to install.

FLOOR BIKE RACKS

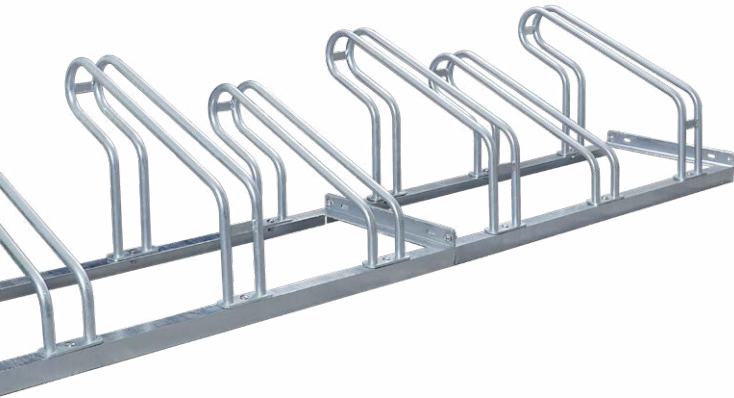

FULLY HOT-DIPPED GALVANISED (MINIMUM 80 MICRONS)

Highly corrosion-resistant treatment that prevents rust.



SPACE-SAVING

Low and high hoops save space for bike parking.



LOCKABLE OPTIONS

Securely lock bike frames for extra safety.



CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

ACCESSORIES:






Ground Spike



Flange Locknuts



90° Angle

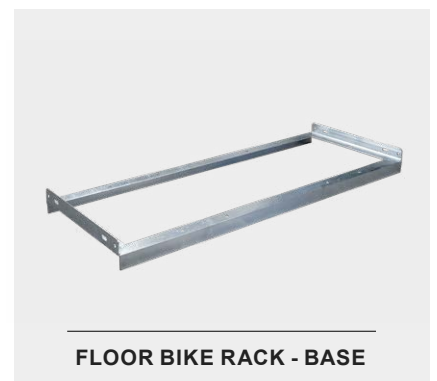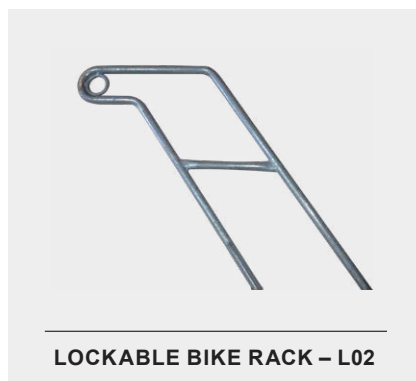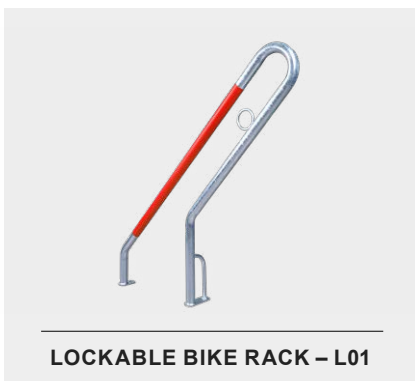

TYPE	TUBE DIAMETER	MAX. TYRE WIDTH	WEIGHT(SMALL / BIG)
S01, S02, S03	Ø 18 mm (Ø 0.7")	45 mm (1.8")	1.2 kg / 1.4 kg, 1.6 kg / 1.8 kg, 1 kg / 1.1 kg

TYPE	AVAILABLE LENGTHS	WIDTH	WEIGHT(700 MM / 1050 MM)
BASE	700 mm (27.6"), 1000 mm (39.4"), 1050 mm (41.3"), 1100 mm (43.3"), etc	395 mm (15.6")	3.5 kg / 4.5 kg






■ PARKING BARRIER (STANDARD)

Material: Mild steel tube.

Surface Treatment: Fully hot-dipped galvanised (after welding).



■ PARKING BARRIER (HEAVY DUTY)

Material: Mild steel tube.

Surface Treatment: Fully hot-dipped galvanised (after welding).



TYPE	WIDTH	HEIGHT	WEIGHT
Standard	700 mm (27.6")	430 mm (16.9")	3 kg
Heavy duty	880 mm (34.6")	440 mm (17.3")	10 kg



■ WALK BEHIND SALT SPREADER 25L

Hopper material: Polypropylene (PP).

Frame material: Steel tubing and powder-coated anti-corrosion finish.

Bolts, rods and linkages: Steel and electro-galvanised.

Spreader gear: Nylon.



■ WALK BEHIND SALT SPREADER 45L

Hopper material: Polypropylene (PP).

Frame material: Steel tubing and powder-coated anti-corrosion finish.

Spreader gear, bolts, rods and linkages: 304 stainless steel.

TYPE	DIMENSIONS (L*W*H)	SPREADING WIDTH	WEIGHT
Salt spreader 25 L	1120 mm × 560 mm × 850 mm (44.1" × 22.0" × 33.5")	3000 mm (118.1")	12 kg
Salt spreader 45 L	1110 mm × 670 mm × 835 mm (43.7" × 26.4" × 32.9")	4000 mm (157.5")	17.5 kg

Traffic Control Equipment

TRAFFIC SAFETY CONES.....	19
METAL ROADWORKS BEACONS	21
PLASTIC ROADWORKS BEACON	21
SCANDINAVIAN DELINEATOR PANEL.....	22
BALLAST SANDBAG	22
EXPANDABLE STEEL BARRIER.....	23
MANHOLE SAFETY BARRIER.....	23





TRAFFIC SAFETY CONES



MAXI GRIP HANDLE

Handle with groove and textured grip for easy, efficient use, even with gloves.



FILM PROTECTION




Reflective films are embedded with a 1 mm recess to prevent tearing.



UNIQUE STACKING SYSTEM

Cone trunks stack apart, preventing sticking and protecting reflective films.


TYPE	HEIGHT	BASE DIMENSIONS	REFLECTIVE SHEETING HEIGHT	WEIGHT
300 mm	300 mm (11.8")	215 x 215 mm (8.5" x 8.5")	100 mm (3.9") x 1	0.5 kg
500 mm	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.1 kg
500 mm (weighted)	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.8 kg
750 mm	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	2 kg
750 mm (weighted 1)	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	3.2 kg
750 mm (weighted 2)	750 mm (29.5")	365 x 365 mm (14.4" x 14.4")	150 mm (5.9") x 2	4.2 kg
750 mm (highway)	750 mm (29.5")	400 x 400 mm (15.7" x 15.7")	150 mm (5.9") x 2	4.2 kg

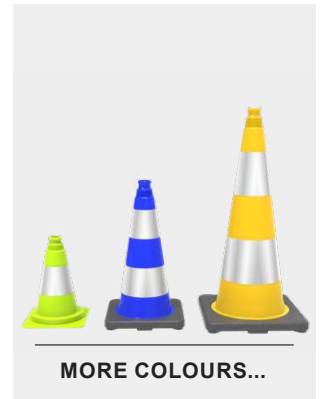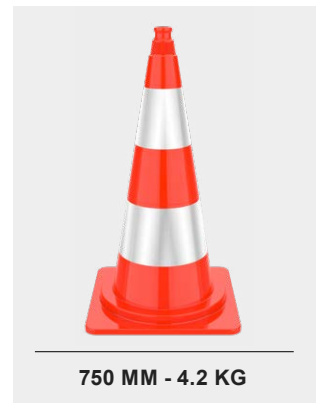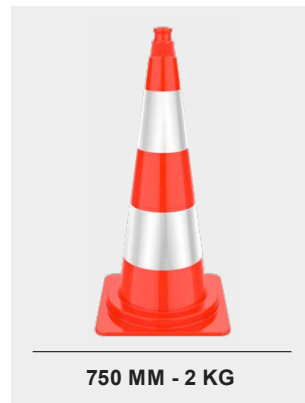






METAL ROADWORKS BEACONS



HIGHLY REFLECTIVE SHEETINGS
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).



GALVANISED STEEL ANGLE & PLATE
Ensures durability and corrosion resistance.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.



ANGLED END
Allows fast and easy installation, even on hard ground.

HEIGHT	GALVANISED STEEL ANGLE	GALVANISED STEEL PLATE	WEIGHT
1100 mm (43")	20 x 15 mm (0.78" x 0.59")	150 x 375 mm (5.9" x 14.7")	0.95 kg



PLASTIC ROADWORKS BEACON



CONVENIENT HANDLE
Easy to carry and install.



HIGHLY REFLECTIVE SHEETINGS
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).



DIRECTIONAL ARROW
Helps you to position the beacon in the correct direction.



COMPANY NAME OR LOGO
Can be moulded-in for easy identification.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS	WEIGHT
Recycled high-density polyethylene (HDPE)	1300 x 280 x 60 mm (51" x 11" x 2.4")	1000 x 250 mm (39" x 10")	2.3 kg

SCANDINAVIAN DELINEATOR PANEL



HIGHLY REFLECTIVE SHEETINGS

Fluo Engineering-Grade (RA1)
Fluo High-Intensity Prismatic Grade (RA3).



DIRECTIONAL ARROW

Helps you to position the beacon in the correct direction.



CONVENIENT HANDLE

Easy to carry and install.



SAVE PACKING STORAGE

Stackable design saves space, prevents slipping, and keeps beacons organised.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS	WEIGHT
Polypropylene (PP)	1000 x 225 x 22 mm (39.5" x 8.85" x 0.87")	800 x 190 mm (31.5" x 7.5")	1 kg

BALLAST SANDBAG



DOUBLE-STITCHED SEAMS

Strong stitching for long-lasting use.



HEAVY-DUTY ROPE

Easy to carry and handle.



8 ALUMINIUM EYELETS

Corrosion-resistant aluminium for a longer lifespan.



COMPANY NAME OR LOGO

Screen-printed logo for easy identification.

MATERIAL	DIMENSIONS (L*W)	DENSITY	CAPACITY	WEIGHT
PVC-coated fabric	600 x 400mm (24" x 15")	640 g/m ²	15 kg (33 lbs) – delivered empty	0.35 kg

EXPANDABLE STEEL BARRIER



PACKAGE:



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.




INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH	FINISHING TREATMENT	WEIGHT
1000 mm (39")	Folded: 200 mm (8"), Unfolded: 2.85 m (9')	Anti-UV powder coating	8.5 kg

MANHOLE SAFETY BARRIER

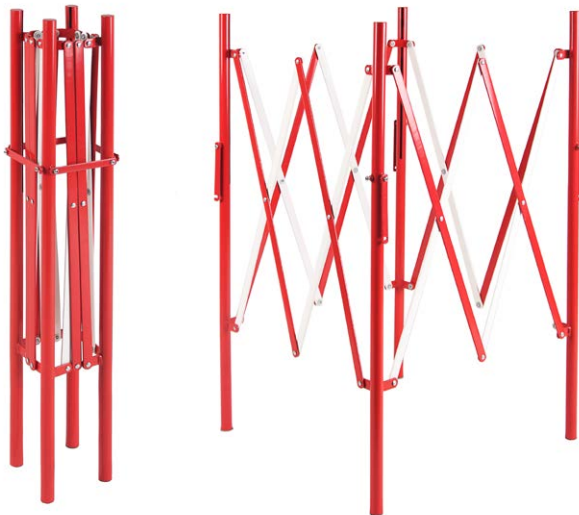

PACKAGE:



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.



INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH & WIDTH	FINISHING TREATMENT	WEIGHT
1000 mm (39")	Folded: 150 x 150 mm (6" x 6"), Unfolded: 1.5 x 1.5 m (4.9' x 4.9')	Anti-UV powder coating	11 kg

Event Management

CABLE RAMPS	25
MODULAR CABLE RAMPS.....	27
DDA CABLE RAMPS.....	29
CABLE PROTECTOR RAMPS - 1200MM	30
HOSE PROTECTOR RAMPS	30
DROP OVERS	31
FLOOR CABLE COVERS.....	31
CROWD CONTROL BARRIERS.....	32
CROWD BARRIER STILLAGE	32



■ CABLE RAMPS

Material of the base:

- 1. Standard version:** Plastic-Rubber composite as a more economical option.
- 2. Heavy-duty version:** Vulcanised rubber for flexibility and durability.

Both are REACH compliant, odourless, and built to last.

✂ 45° CORNER SECTIONS:



2 Channels
45° Left Turn / Right Turn

3 Channels
45° Left Turn / Right Turn

5 Channels
45° Left Turn / Right Turn




TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	WEIGHT (STANDARD / HEAVY-DUTY)
2 Channels	990 x 240 x 45 mm (39" x 9.5" x 1.8")	30 x 32 mm (1.18" x 1.26")	6 kg / 7 kg
3 Channels	900 x 500 x 70 mm (35.5" x 20" x 2.75")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")	16 kg / 18 kg
5 Channels	900 x 500 x 50 mm (35.5" x 20" x 2")	38 x 32 mm (1.5" x 1.26")	13 kg / 14 kg



THICK YELLOW LID

UV-stabilised PE with a non-slip surface to reduce tripping risks.



REINFORCED STRUCTURE

Premium material to reinforce key stress points like hinges and connectors.




45° LEFT TURN / RIGHT TURN (2, 3 AND 5 CHANNELS)

Helps create right or left turns, keeping walking spaces safe.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.

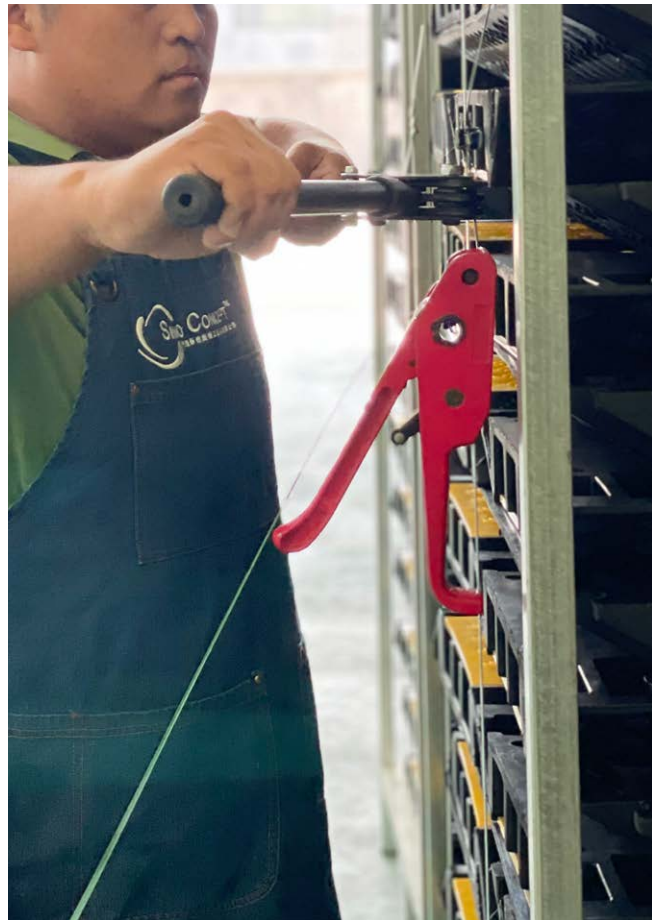

MODULAR CABLE RAMPS




Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

COMPATIBLE PRODUCT / ACCESSORIES:



5 Channels Cable Ramp




Rubber H-Connectors

TYPE	DIMENSIONS (L*W*H , EXCLUDING CONNECTORS)	CHANNEL DIMENSIONS (W*H)	WEIGHT
Middle part	895 x 370 x 50 mm (35.2" x 14.6" x 2")	37.5 x 35 mm (1.48" x 1.38")	13 kg
Standard ramp	895 x 140 x 50 mm (35.2" x 5.5" x 2")	/	5 kg
Gentle slope ramp	895 x 500 x 50 mm (35.2" x 19.7" x 2")	/	16 kg
Half gentle slope ramp	447.5 x 500 x 50 mm (17.6" x 19.7" x 2")	/	9 kg



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.

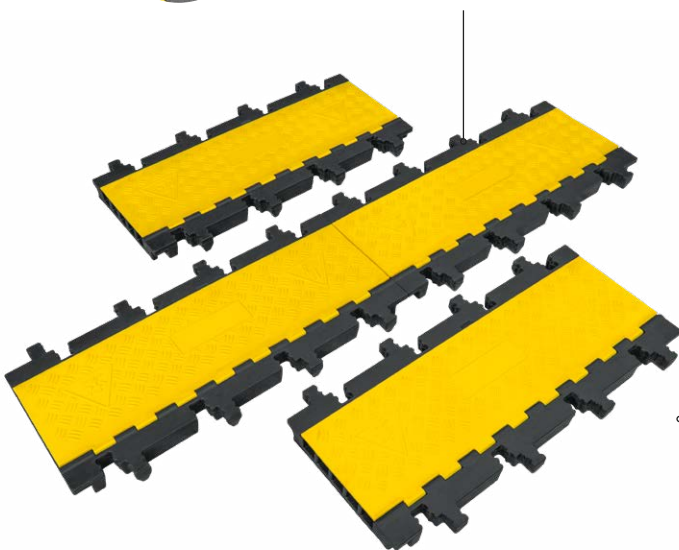

SKID-PROOF SURFACE

Non-slip surface for better grip.





GENTLE SLOPE RAMP

5° incline for smooth and easy access for wheelchairs and pedestrians.


FLEXIBLE MODULAR DESIGN

The modular cable ramp allows for easy and flexible assembly to suit various needs.

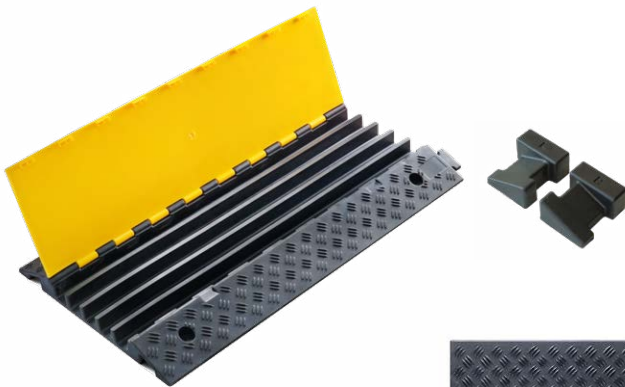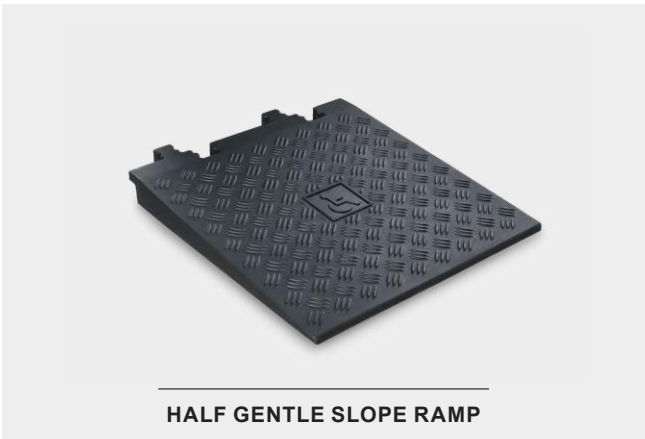

COMPATIBLE WITH 5-CHANNEL CABLE RAMP

The middle modular cable ramp seamlessly connects with our 5-channel cable ramps using H-Connectors, ensuring a secure and continuous cable protection system.

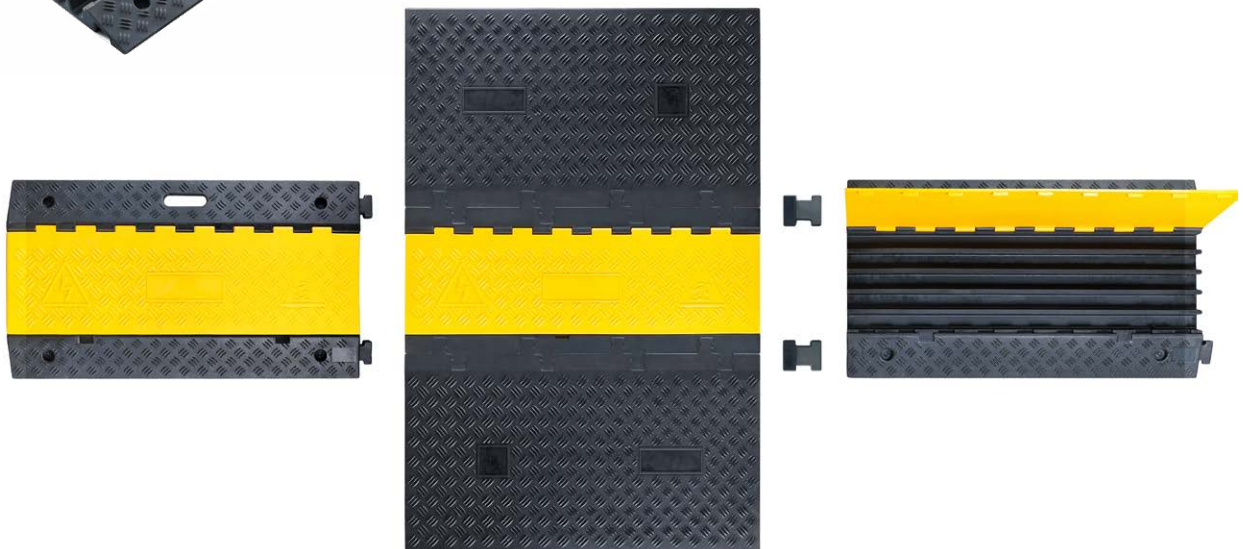



DDA CABLE RAMPS

Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

COMPATIBLE PRODUCT :



BUILT-IN HANDLE

Easy to transport and reduces fatigue, saving time during installation and storage.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.



NYLON ROD

Integrated nylon rod securely connects the base and yellow cover, preventing detachment.



DDA/ADA COMPLIANT

Meets the requirements of the DDA and ADA standards, ensuring accessibility.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	WEIGHT
2 Channels	990 x 915 x 45 mm (39" x 36" x 2")	30 x 32 mm (1.18" x 1.26")	25 kg
3 Channels	450 x 1472 x 70 mm (17.7" x 57.9" x 2")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")	24 kg
5 Channels	450 x 1090 x 50 mm (17.7" x 42.9" x 2")	38 x 32 mm (1.5" x 1.26")	16 kg

■ CABLE PROTECTOR RAMPS - 1200MM



SKID-PROOF SURFACE
Non-slip surface for better grip.



CABLE COVER BASE
Designed to receive two cables up to $\varnothing 20$ mm ($\varnothing 0.8''$) and one cable up to $\varnothing 40$ mm ($\varnothing 1.6''$).





COMPANY NAME OR LOGO
Can be moulded-in for easy identification.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	WEIGHT
1200 x 200 x 60 mm (47" x 8" x 2.5")	1 x $\varnothing 42$ mm ($\varnothing 1.65''$) and 2 x $\varnothing 20$ mm ($\varnothing 0.8''$)	10.5 kg

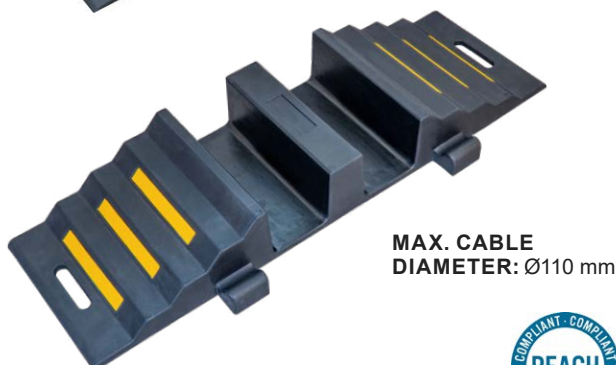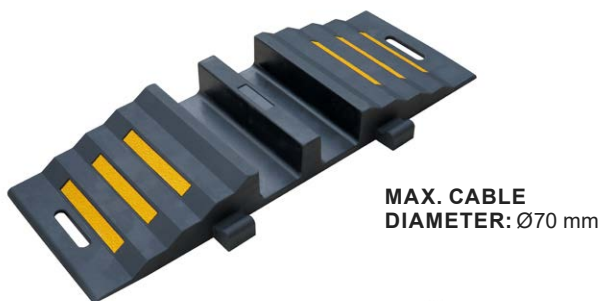

■ HOSE PROTECTOR RAMPS



BUILT-IN HANDLE
Easy to transport and reduces fatigue, saving time during installation and storage.



REFLECTIVE FILMS
Embedded thermoplastic reflective road marking films to enhance visibility and safety.



INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	MAX. WEIGHT CAPACITY	WEIGHT
850 x 300 x 85 mm (33" x 12" x 3.3")	90 x 70 mm (3.54" x 2.76")	9,000 kg (20,000 lbs) per axle	11.5 kg
970 x 300 x 130 mm (38" x 12" x 5")	110 x 110 mm (4.33" x 4.33")	20,000 kg (44,000 lbs) per axle	19 kg

■ DROP OVERS



✂️ OPTIONAL COLOURS:



SKID-PROOF SURFACE

Non-slip surface for better grip.



MADE OF THERMOPLASTIC POLYURETHANE

Flexible material that perfectly fits uneven floors.



INTERLOCKING SYSTEM

Easy to install and use, with no risk of disconnecting during operation.




ANTI-SLIP PADS

Improves grip on smooth surfaces.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	WEIGHT
Small	914 x 135 x 22 mm (36" x 5.25" x 0.87")	40 x 14 mm (1.57" x 0.55")	1.5 kg
Large	914 x 280 x 40 mm (36" x 11" x 1.57")	104 x 30 mm (4" x 1.25")	4 kg

■ FLOOR CABLE COVERS




SKID-PROOF SURFACE

Non-slip surface for better grip.



1 CHANNEL - TOP SLIT

To install the cable from the top.



3 CHANNELS - TOP & BOTTOM SLIT

To install the cable from the top & bottom.



CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS	MAX. CABLE DIAMETER	WEIGHT
1 Channel	10,000 x 100 x 30 mm (33' x 4" x 1.2")	Ø 20 mm (Ø 0.8")	21 kg
3 Channels	4,000 x 160 x 50 mm (13' x 6" x 2")	1 x Ø 40 mm (Ø 1.6") and 2 x Ø 20 mm (Ø 0.8")	21 kg

■ CROWD CONTROL BARRIERS



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



FULLY HOT-DIPPED GALVANISED (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.




PATENTED HANDLE
Allows carrying two barriers at once (unique on the market).



REINFORCED INTERLOCKING SYSTEM
Extra-thick 5 mm connectors for strong and stable use.

TYPE	DIMENSIONS (L*H)	TUBE DIAMETERS	WEIGHT
Crowd barrier - 1 Metre	1000 x 1090 mm (39" x 43")	Frame: Ø 32 mm (Ø 1.3"), 6 Inner rails: Ø 16 mm (Ø 0.6")	8 kg
Crowd barrier - 2 Metres	2000 x 1090 mm (79" x 43")	Frame: Ø 32 mm (Ø 1.3"), 14 Inner rails: Ø 16 mm (Ø 0.6")	12.5 kg

■ CROWD BARRIER STILLAGE

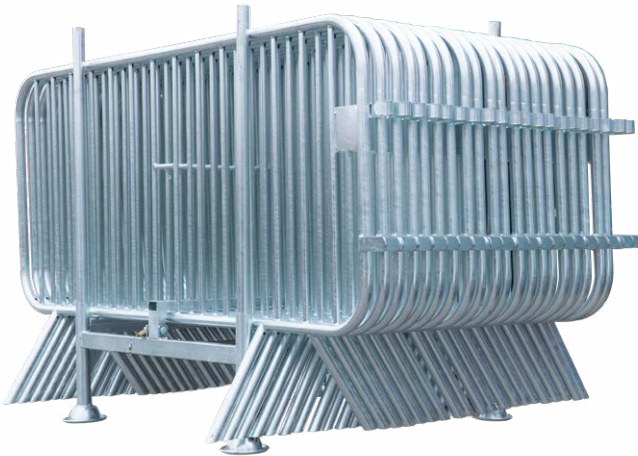

SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



FULLY HOT-DIPPED GALVANISED (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.



SINGLE LOCK SYSTEM
Simple and effective, prevents the loss of crowd control barriers.



STACKING SYSTEM
Stable stacking for easy management.

🔗 APPLICABLE PRODUCTS:




DIMENSIONS (L*W*H)	CONTAINS	WEIGHT
980 x 910 x 1200 mm (38.6" x 35.8" x 47.2")	20 Pieces of crowd barriers	32 kg



Street Furniture

BOLLARDS.....	35
LOCKABLE REMOVABLE BOLLARD SOCKET.....	36
PEDESTRIAN GUARDRAIL.....	37
DECORATIVE OUTDOOR TRASH BINS.....	39
HOOPED PERIMETER BARRIERS.....	39
LAMP POST PROTECTOR HOOPS.....	40
POLE AND COLUMN PROTECTORS.....	40



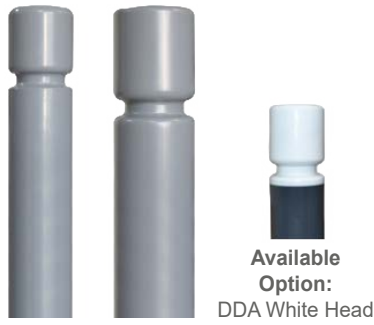

BALL-TOP BOLLARDS

GROOVE BOLLARDS



DECORATIVE BOLLARDS



All our metal products are available in various surface and finishing treatments:


- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating

TYPE	DIAMETER	HEIGHT
Ball-top bollard	Ø76 mm / 114 mm	1200 mm / 1500 mm
Groove bollard	Ø76 mm / 102 mm	1200 mm / 1500 mm
Decorative bollard	Ø60 mm	1200 mm / 1500 mm

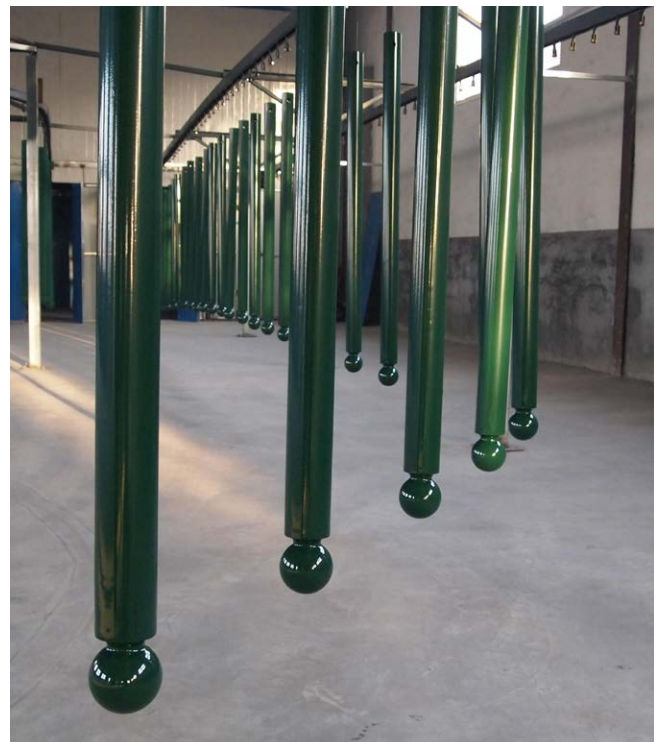




3 GROOVES BOLLARDS

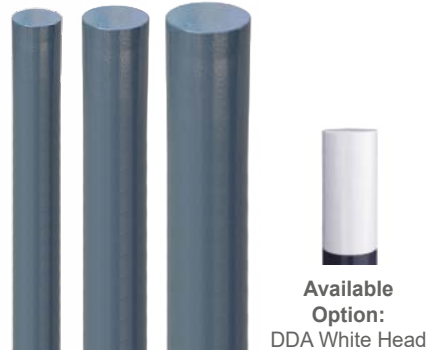

FLAT-TOP BOLLARDS

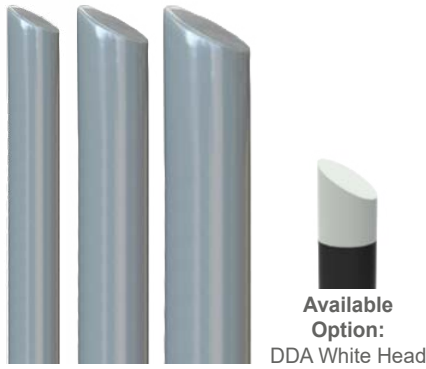

MITRE-TOP BOLLARDS



DOME-TOP BOLLARDS


TYPE	DIAMETER	HEIGHT	THICKNESS
3 Grooves bollard	Ø76 mm	1200 mm / 1500 mm	3 mm
Flat-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm	3 mm
Mitre-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm	3 mm
Dome-top bollard	Ø76 mm / 88.9 mm / 102 mm	1200 mm / 1500 mm	3 mm

LOCKABLE REMOVABLE BOLLARD SOCKET

Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).


Finishing Treatment
Anti-UV powder coating.

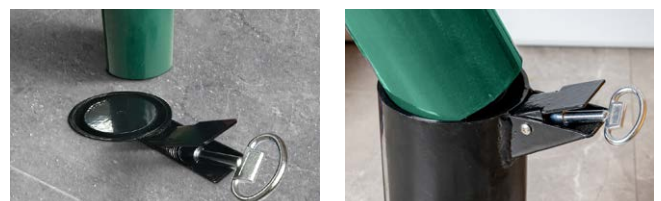

TYPE	DIAMETER	HEIGHT
Lockable removable bollard socket	Ø76 mm / 102 mm	275 mm



**CROSS PEDESTRIAN
GUARDRAIL**

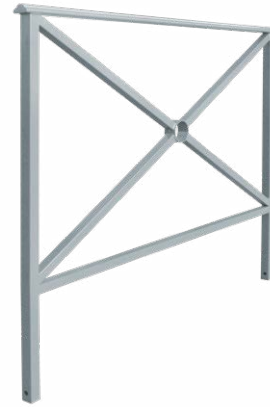

**SHANGHAI PEDESTRIAN
GUARDRAIL**

TYPE	LENGTH	HEIGHT
Cross pedestrian guardrail	1640 mm / 840 mm	1100 mm
Shanghai pedestrian guardrail	1500 mm / 1000 mm	1250 mm



All our metal products are available in various surface and finishing treatments:

- Zinc-rich primer powder.
- Fully hot-dipped galvanised (after welding).
- Anti-UV powder coating



**BALL-TOP PEDESTRIAN
GUARDRAIL**



**DIAMOND PATTERN
PEDESTRIAN GUARDRAIL**

TYPE	LENGTH	HEIGHT
Ball-top pedestrian guardrail	1640 mm / 840 mm	1100 mm
Diamond pattern pedestrian guardrail	1640 mm / 840 mm	1100 mm



DECORATIVE OUTDOOR TRASH BINS



Material
Mild steel tube.

Surface Treatment
Options 1: Zinc-rich primer powder.
Options 2: Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	DIAMETER	HEIGHT	CAPACITY
Trash can	Ø350 mm	780 mm	50 L

HOOPED PERIMETER BARRIERS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.

Customise your hoop barriers

with our different options:



CROSSBAR
For an increased resistance and safety



BASE PLATE
To be fixed directly to surface for easy install

TYPE	LENGTH	HEIGHT
Surface mounted	1000, 1500, 2000 mm	1000 mm
Embedded	1000, 1500, 2000 mm	1300 mm

LAMP POST PROTECTOR HOOPS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	HEIGHT	WIDTH	THICKNESS
Surface mounted	690 mm	560 mm	2 mm
Embedded	870 mm	560 mm	2 mm

POLE AND COLUMN PROTECTORS



Material
Mild steel tube.

Surface Treatment
Fully hot-dipped galvanised (after welding).

Available Finishing Treatment
Anti-UV powder coating.



TYPE	LENGTH	WIDTH	HEIGHT
Surface mounted	600 mm	600 mm	500 mm
Embedded	600 mm	600 mm	680 mm



FRENCH-OWNED COMPANY
WITH MANUFACTURING OPERATIONS IN CHINA

THANK YOU FOR YOUR INTEREST IN OUR PRODUCTS!

For more products and details, please visit our website:

<https://www.sinoconcept.com>



PRODUCTION & OPERATIONS CENTRE:

27 Ping Xiang Road, Shibe District,
Shui Xiang Yuan,
Building 6, Unit 3, Door 102
266011 Qingdao, China

Phone number: 0086 532 8561 1600

HEADQUARTERS:

The Cloud, RM 102 , 1/F,
111 Tung Chau Street
Tai Kok Tsui
999077 Hong Kong, China

CONTACT US

contact@sinoconcept.com