



# FLOOR BIKE RACK - S01 SERIES



FLOOR BIKE RACK – S01



FLOOR BIKE RACK – S01 + L01



FLOOR BIKE RACK – S01 + L02



SPACE-SAVING



HOT-DIP GALVANISED FINISH



SEAMLESS, STRONG WELD




Headquarters: Hong Kong, China  
Production & Operations Centre: Qingdao, China




contact@sinoconcept.com  
www.sinoconcept.com


# Specifications and dimensions

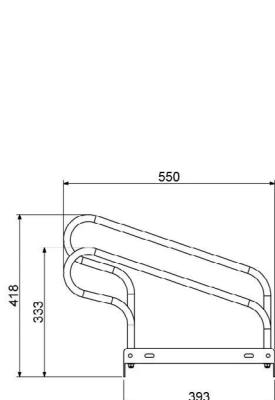


S01 BIKE RACK DIMENSIONS

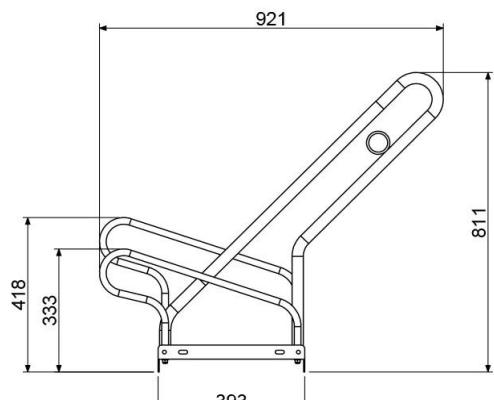


S01+ L01 BIKE RACK DIMENSIONS

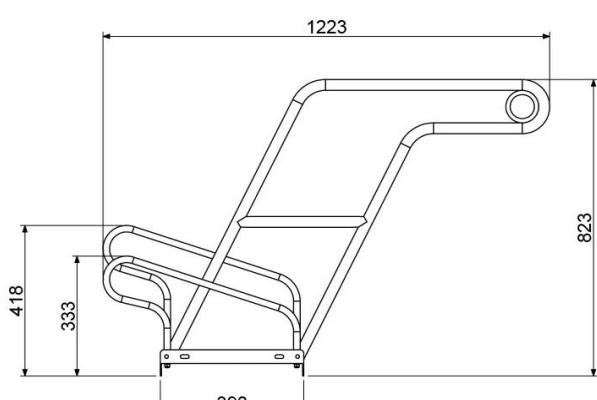

S01+ L02 BIKE RACK DIMENSIONS

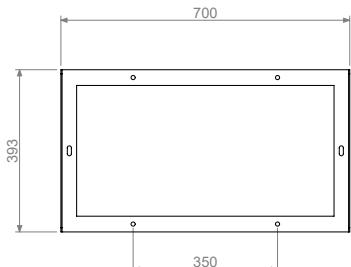

700 MM BASE DIMENSIONS

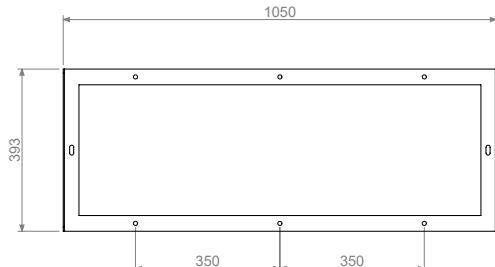

1050 MM BASE DIMENSIONS

BASES	PARKING SPACES	BIKE SPACING (CENTRE TO CENTRE)	MATERIAL & SURFACE TREATMENT
700 mm (27.6")	2 Bikes		
1050 mm (41.3")	3 Bikes		
700 mm (27.6") + 700 mm (27.6")	4 Bikes	350 mm (13.8")	Mild steel & Fully hot-dipped galvanised (after welding)
700 mm (27.6") + 1050 mm (41.3")	5 Bikes		
1050 mm (41.3") + 1050 mm (41.3")	6 Bikes		




MOUNTING HARDWARE



CONNECT BASE TOGETHER



ANGLE FOR FLOOR FIXING



GROUND SPIKES



Headquarters: Hong Kong, China  
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com  
www.sinoconcept.com

# Advantages +



## SPACE-SAVING

Low and high hoops save space for bike parking.



## HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)

Highly corrosion-resistant treatment that prevents rust.



## LOCKABLE OPTIONS

Securely lock bike frames for extra safety.



## VERSATILE

Works on one or both sides.



## FLEXIBLE BASE OPTIONS

Bases available in multiple lengths (from 2 to 6 bikes or more) and can be joined for larger installations.



## EASY INSTALLATION

Can be placed directly on the ground or fixed to asphalt or concrete with bolts.



## BEST SELLERS



Headquarters: Hong Kong, China  
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com  
www.sinoconcept.com