





5 CM PLASTIC-RUBBER COMPOSITE SPEED BUMP



5 CM STANDARD VERSION

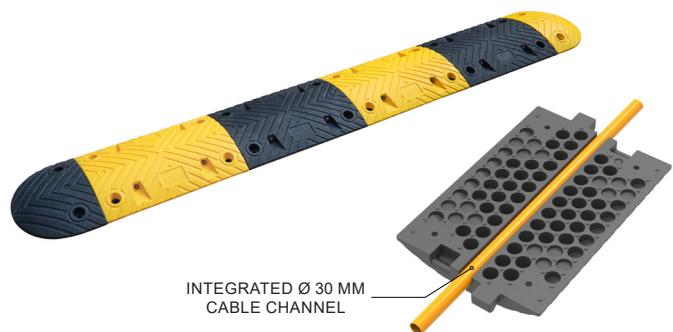

5 CM HEAVY-DUTY VERSION



Headquarters: Hong Kong, China
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com
www.sinoconcept.com

Advantages +



PLASTIC-RUBBER COMPOSITE

Cost effective, UV-resistant, and very sturdy.

YELLOW MOULDED-IN COVER

Built into the speed bump to stay bright with no peeling or fading. Yellow stays yellow.

SKIDPROOF SURFACE

Non-slip surface for better grip.

180° GLASS BEAD REFLECTORS

Highly visible in all conditions.

INTERLOCKING SYSTEM


Male and female connectors to prevent movement and allow quick installation.

CUSTOM-MADE PACKING

Designed for international shipping, easy storage and delivery.

TYPES	BUILT-IN CHANNEL	MAX. LOAD CAPACITY	OVERALL DIMENSIONS	MOUNTING HARDWARE
Standard version	✗	20 tons per axle	Middle part: 500 x 350 x 50 mm (20" x 14" x 2") End cap: 250 x 350 x 50 mm (10" x 14" x 2")	Coach screw: M12 x 160 mm (M12 x 6") Anchor: Ø 17 x 105 mm (Ø 0.67" x 4.1")
Heavy-duty version	✓	25 tons per axle		

BEST SELLERS



Headquarters: Hong Kong, China
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com
www.sinoconcept.com