





# SPEED HUMPS




SPEED HUMP 3 CM

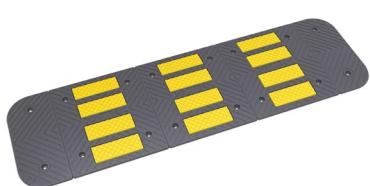


SPEED HUMP 5 CM (600 MM)

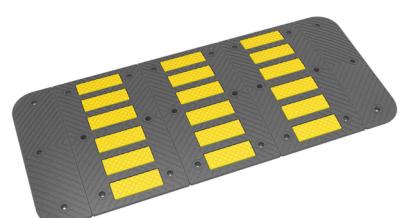


SPEED HUMP 5 CM (900 MM)

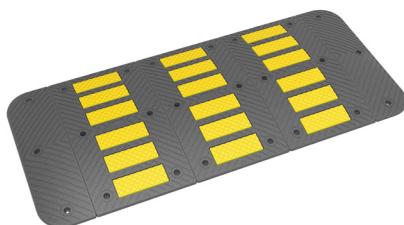


SPEED HUMP 7 CM (900 MM)

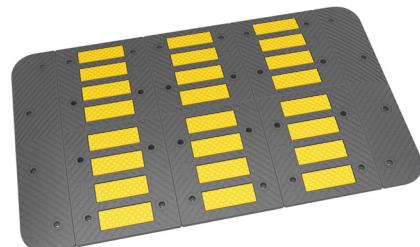

SPEED HUMP 7 CM (1200 MM)



YELLOW MOULDED-IN COVER



INTERLOCKING SYSTEM



REACH CERTIFIED




Headquarters: Hong Kong, China  
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com  
www.sinoconcept.com

# Advantages +

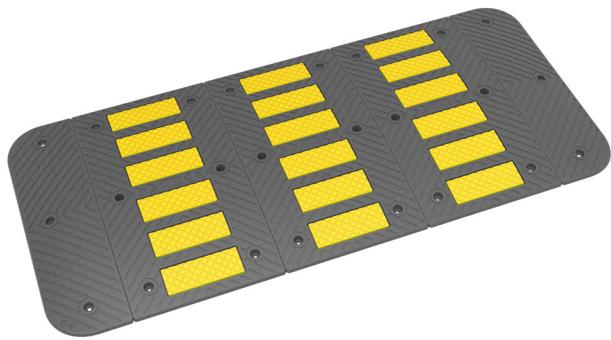

## YELLOW MOULDED-IN COVER

Built into the speed hump to stay bright with no peeling or fading. Yellow stays yellow.



## PLASTIC-RUBBER COMPOSITE

Cost-effective, UV-resistant, and very sturdy.



## INTERLOCKING SYSTEM

Male and female connectors to prevent movement and allow quick installation.



## 2-IN-1 PRODUCT

Built-in channels for cable protection.



## HEAVY-DUTY HARDWARE

Premium-quality screws and plastic anchors – rust-proof and highly durable.

PRODUCTS	TYPES	OVERALL DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER	MOUNTING HARDWARE
	Speed Hump 3 cm	Middle part: 500 x 600 x 30 mm (20" x 24" x 1.18") End cap: 250 x 600 x 30 mm (10" x 24" x 1.18")	/	
	Speed Hump 5 cm (600mm)	Middle part: 500 x 600 x 50 mm (20" x 24" x 1.97") End cap: 250 x 600 x 50 mm (10" x 24" x 1.97")	2 x Ø 30 mm (Ø 1.18")	Coach screw: M12 x 160 mm
	Speed Hump 5 cm (900mm)	Middle part: 500 x 900 x 50 mm (20" x 35" x 1.97") End cap: 250 x 900 x 50 mm (10" x 35" x 1.97")	2 x Ø 30 mm (Ø 1.18")	(M12 x 6") Anchor: Ø 17 x 105 mm (Ø 0.67" x 4.1")
	Speed Hump 7 cm (900mm)	Middle part: 500 x 900 x 70 mm (20" x 35" x 2.76") End cap: 250 x 900 x 70 mm (10" x 35" x 2.76")	2 x Ø 45 mm (Ø 1.77")	
	Speed Hump 7 cm (1200mm)	Middle part: 500 x 1200 x 70 mm (20" x 47" x 2.76") End cap: 250 x 1200 x 70 mm (10" x 47" x 2.76")	2 x Ø 45 mm (Ø 1.77")	

## BEST SELLERS



Headquarters: Hong Kong, China  
Production & Operations Centre: Qingdao, China



contact@sinoconcept.com  
www.sinoconcept.com